EC 177 OX XSafe

Self Contained Ice machine up to 83 kg



CHARACTERISTICS

• Production of single Gourmet cubes with a truncated cone shape.
• External finish in stainless steel.
• Electronic control.
• Front airflow for air-cooled model for undercounter installations.
• Easy-access front ON/OFF switch.
• PWD - Progressive Water Discharge: Pumps excess residual water up to a distance of 15 metres.
• XSafe: A completely natural sanitization system integrated into the machine. It works automatically and continuously, keeping the machine clean and sanitized.



EC S
Little Gourmet 8 g
Ø 21 mm - H 25 mm



EC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm



EC L
LARGE GOURMET 39 g
Ø 38 mm - H 41 mm

Model	Cube	Ø	H	Weight
EC S	Small	21 mm	25 mm	8 g
EC M	Medium	30 mm	34 mm	20 g
EC L	Large	38 mm	41 mm	39 g

CONDENSING SYSTEM
Air condensation
Water condensation

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1
220-240\60\1

BIN CAPACITY

KG
48

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

EC 177 OX *XSafe*

Scotsman Ice Systems

Self Contained Ice machine up to 83 kg

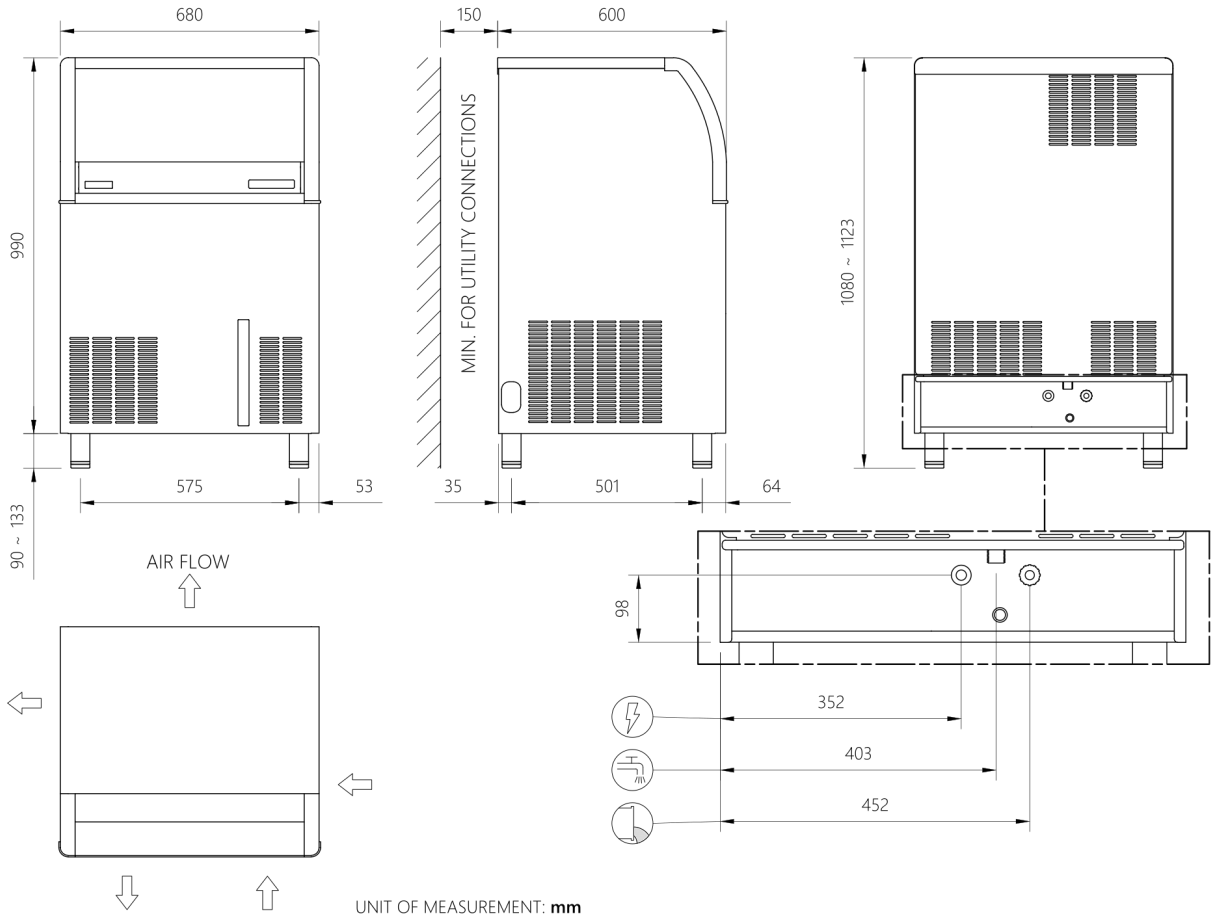

MACHINE DATA	SHIPPING DATA	
Dimensions (LxWxH): 680 x 600 x 1080 mm Net weight 61 kg	Dimensions (LxWxH): 75 x 67 x 117 cm Peso netto 72 kg	(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
ECL 177 AS EASY	230\50\1	A	69	66	57	1,20	15,0	8,0	830	1,50	10
ECL 177 WS EASY	230\50\1	W	71	68	62	1,20	13,0	56,0	700	1,50	10
ECM 177 AS EASY	220-240\60\1	A	82	81	65	1,80	17,0	13,0	970	1,50	10
ECM 177 AS EASY	230\50\1	A	83	82	61	0,00	13,0	13,0	750	1,50	10
ECM 177 WS EASY	230\50\1	A	78	74	67	1,20	12,0	52,0	620	1,50	10
ECS 177 AS EASY	230\50\1	A	69	64	45	1,50	15,0	11,0	820	1,50	10