# AC 87

## Ice maker with built-in bin, up to 44 kg



CHARACTERISTICS

- Production of single Gourmet cubes with a truncated cone shape.
- External finish in stainless steel.
- Electronic control.
- Front airflow for air-cooled model for undercounter installations.
- Clean Alert: A flashing light alerts you when it's time to clean the filter.
- Door closing system equipped with anti-noise rubber pads.



**AC S**
Little Gourmet 8 g
Ø 21 mm - H 25 mm



**AC M**
Medium Gourmet 20 g
Ø 30 mm - H 34 mm



**AC L**
LARGE GOURMET 39 g
Ø 38 mm - H 41 mm

| Model | Cube | Ø | H | Weight |
|---|---|---|---|---|
| **AC S** | Small | 21 mm | 25 mm | 8 g |
| **AC M** | Medium | 30 mm | 34 mm | 20 g |
| **AC L** | Large | 38 mm | 41 mm | 39 g |

CONDENSING SYSTEM
Air
Water condensation

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1
220-240\60\1

BIN CAPACITY

| KG |
|---|
| 19 |

CERTIFICATIONS

OPERATIONAL REQUIREMENTS


| | Minimum | Maximum |
|---|---|---|
| Air temperature | 10 | 43 |
| Water temperature | 5 | 38 |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Voltage | -10% | +10% |

IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

# AC 87

## Ice maker with built-in bin, up to 44 kg

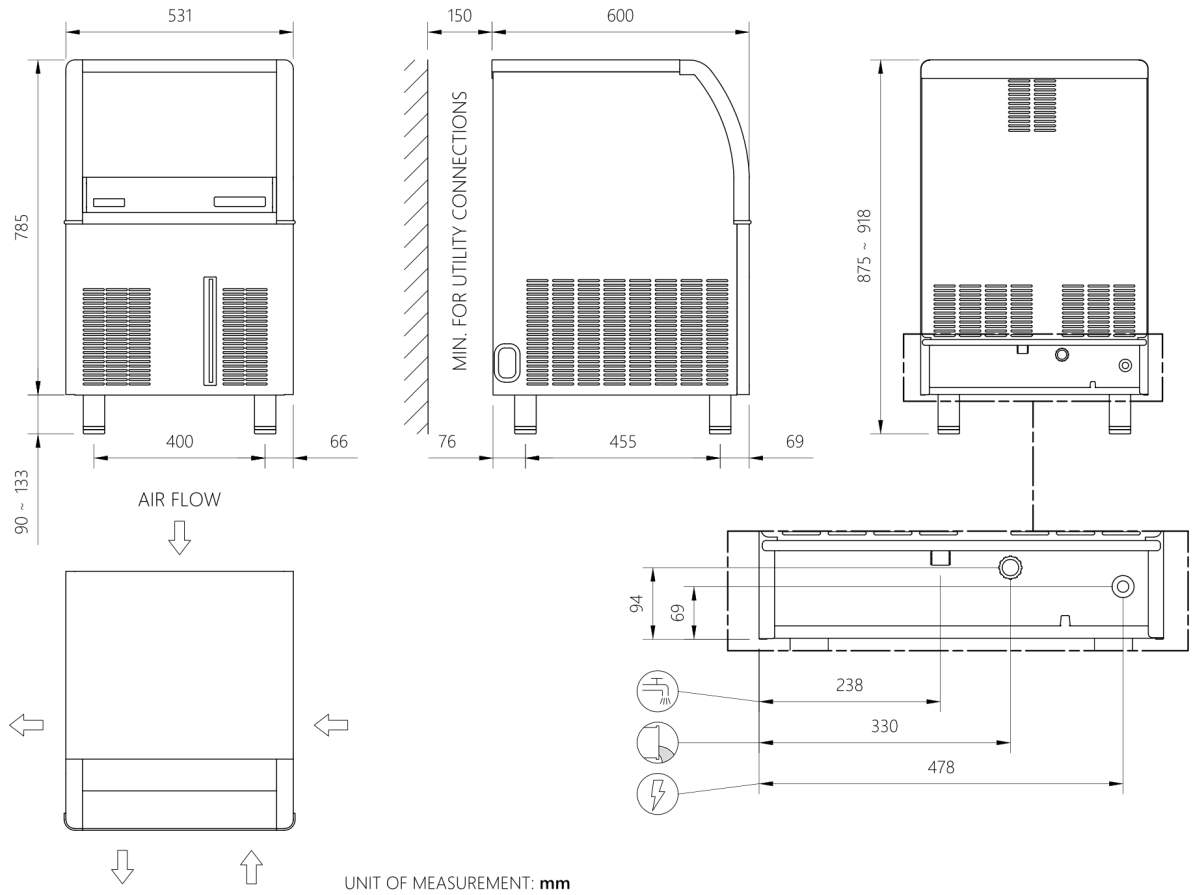


| MACHINE DATA | SHIPPING DATA | |
|---|---|---|
| Dimensions (LxWxH): 531 x 600 x 875 mm<br>Net weight 44 kg | Dimensions (LxWxH): 60 x 67 x 93 cm<br>Net weight 51 kg | (*) The data refers to the following temperature conditions:<br>32°C Ambient / 21°C Water |

| | | | Ice production kg in 24 h °C Ambient / °C Water | | | Heat dispersion | Consumo Energia (*) | Consumption Water (*) | Instant power | Cables | Fuse |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Version | Voltage | Condensation | 10°C/10°C | 21°C/10°C | 32°C/21°C | kW | kWh/24h | l/h | W | No. x Ømm² | A |
| ACL 87 AS 230/50/1 | 230\50\1 | A | 36 | 35 | 31 | 0,90 | 10,0 | 3,0 | 550 | 1,50 | 10 |
| ACL 87 WS 230/50/1 | 230\50\1 | W | 38 | 37 | 34 | 1,00 | 9,0 | 33,0 | 420 | 1,50 | 10 |
| ACM 87 AS | 220-240\60\1 | A | 45 | 41 | 38 | 1,10 | 11,0 | 6,0 | 685 | 1,50 | 10 |
| ACM 87 AS | 230\50\1 | A | 44 | 43 | 35 | 0,90 | 9,0 | 3,0 | 570 | 1,50 | 10 |
| ACM 87 WS 230/50/1 | 230\50\1 | W | 43 | 41 | 36 | 1,00 | 9,0 | 32,0 | 415 | 1,50 | 10 |
| ACS 87 AS | 230\50\1 | A | 40 | 39 | 31 | 0,00 | 11,0 | 5,0 | 580 | 1,50 | 10 |