EC 107 OX *XSafe*

Ice maker with built-in bin, up to 53 kg



CHARACTERISTICS

- Production of single Gourmet cubes with a truncated cone shape.
- External finish in stainless steel.
- Electronic control.
- Front airflow for air-cooled model for undercounter installations.
- Easy-access front ON/OFF switch.
- PWD - Progressive Water Discharge: Pumps excess residual water up to a distance of 15 metres.
- XSafe: A completely natural sanitization system integrated into the machine. It works automatically and continuously, keeping the machine clean and sanitized.



EC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm



EC L
LARGE GOURMET 39 g
Ø 38 mm - H 41 mm

Model	Cube	Ø	H	Weight
EC M	Medium	30 mm	34 mm	20 g
EC L	Large	38 mm	41 mm	39 g

CONDENSING SYSTEM
Air
Water condensation

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1
220-240\60\1

BIN CAPACITY

KG
23

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

EC 107 OX *XSafe*

Scotsman Ice Systems

Ice maker with built-in bin, up to 53 kg

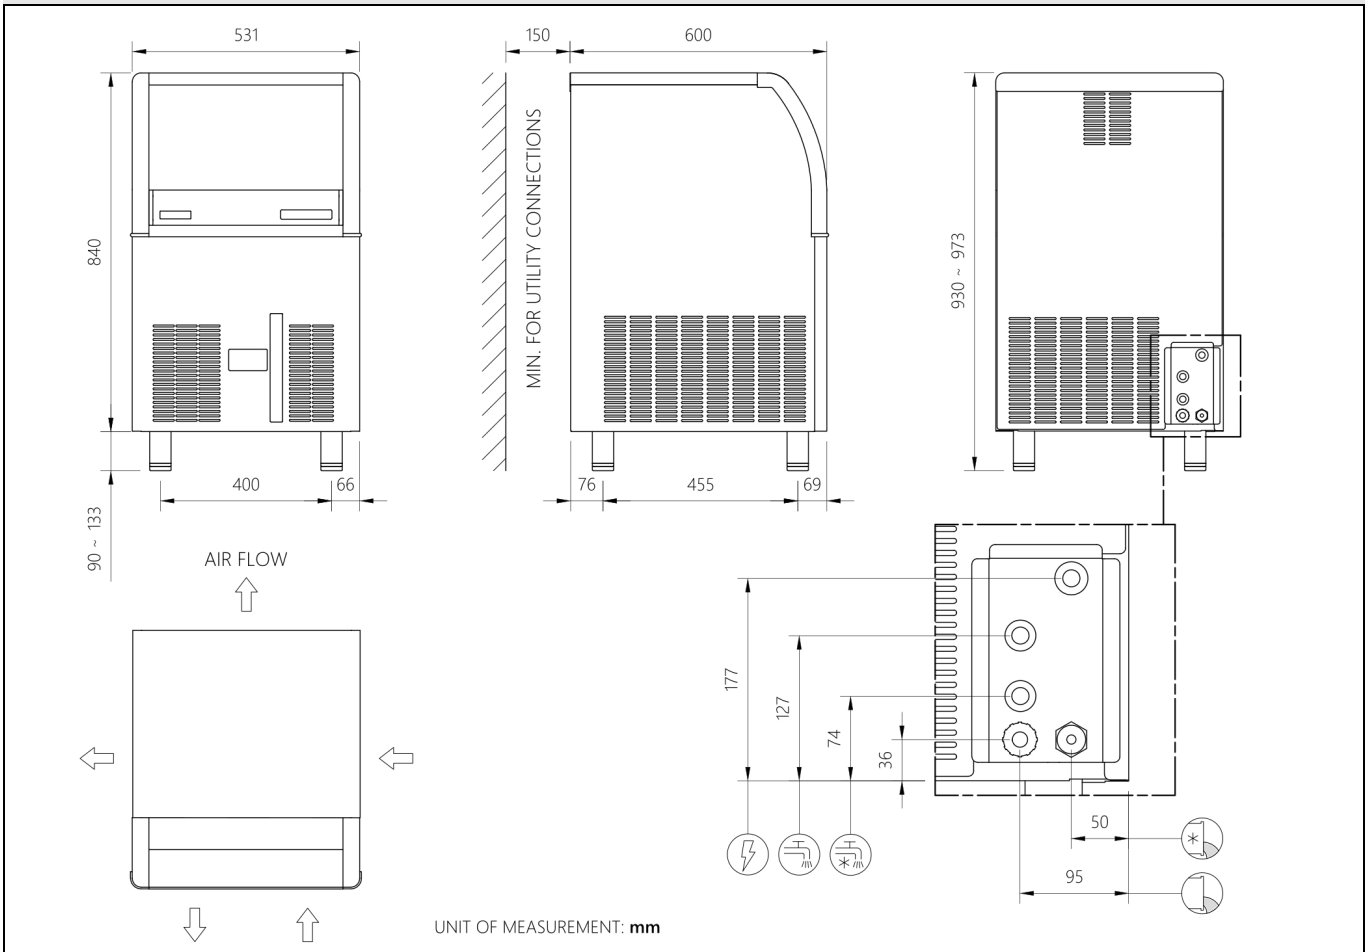

MACHINE DATA	SHIPPING DATA	
Dimensions (LxWxH): 531 x 600 x 930 mm Net weight 50 kg	Dimensions (LxWxH): 60 x 67 x 99 cm Peso netto 57 kg	(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
ECL 107 AS EASY	230\50\1	A	46	44	37	0,40	10,0	6,0	595	1,50	10
ECL 107 WS EASY	230\50\1	W	49	47	41	1,00	9,0	36,0	505	1,50	10
ECM 107 AS EASY	220-240\60\1	A	56	52	44	1,30	12,0	7,0	720	1,50	10
ECM 107 AS 230/50	230\50\1	A	53	51	43	0,00	11,0	5,0	580	0,00	10
ECM 107 AS EASY	230\50\1	A	53	51	43	0,00	11,0	5,0	580	0,00	10
ECM 107 WS EASY	230\50\1	W	54	53	48	1,00	9,0	57,0	485	1,50	10