EC 57 OX *XSafe*

Self Contained Ice machine up to 33 kg



CHARACTERISTICS

- Production of single Gourmet cubes with a truncated cone shape.
- External finish in stainless steel.
- Electronic control.
- Front airflow for air-cooled model for undercounter installations.
- Easy-access front ON/OFF switch.
- PWD - Progressive Water Discharge: Pumps excess residual water up to a distance of 15 metres.
- XSafe: A completely natural sanitization system integrated into the machine. It works automatically and continuously, keeping the machine clean and sanitized.



EC S
Little Gourmet 8 g
Ø 21 mm - H 25 mm



EC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm



EC L
LARGE GOURMET 39 g
Ø 38 mm - H 41 mm

Model	Cube	Ø	H	Weight
EC S	Small	21 mm	25 mm	8 g
EC M	Medium	30 mm	34 mm	20 g
EC L	Large	38 mm	41 mm	39 g

CONDENSING SYSTEM
Air condensation
Water condensation

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1
220-240\60\1

BIN CAPACITY

KG
11

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

EC 57 OX *XSafe*

Scotsman Ice Systems

Self Contained Ice machine up to 33 kg

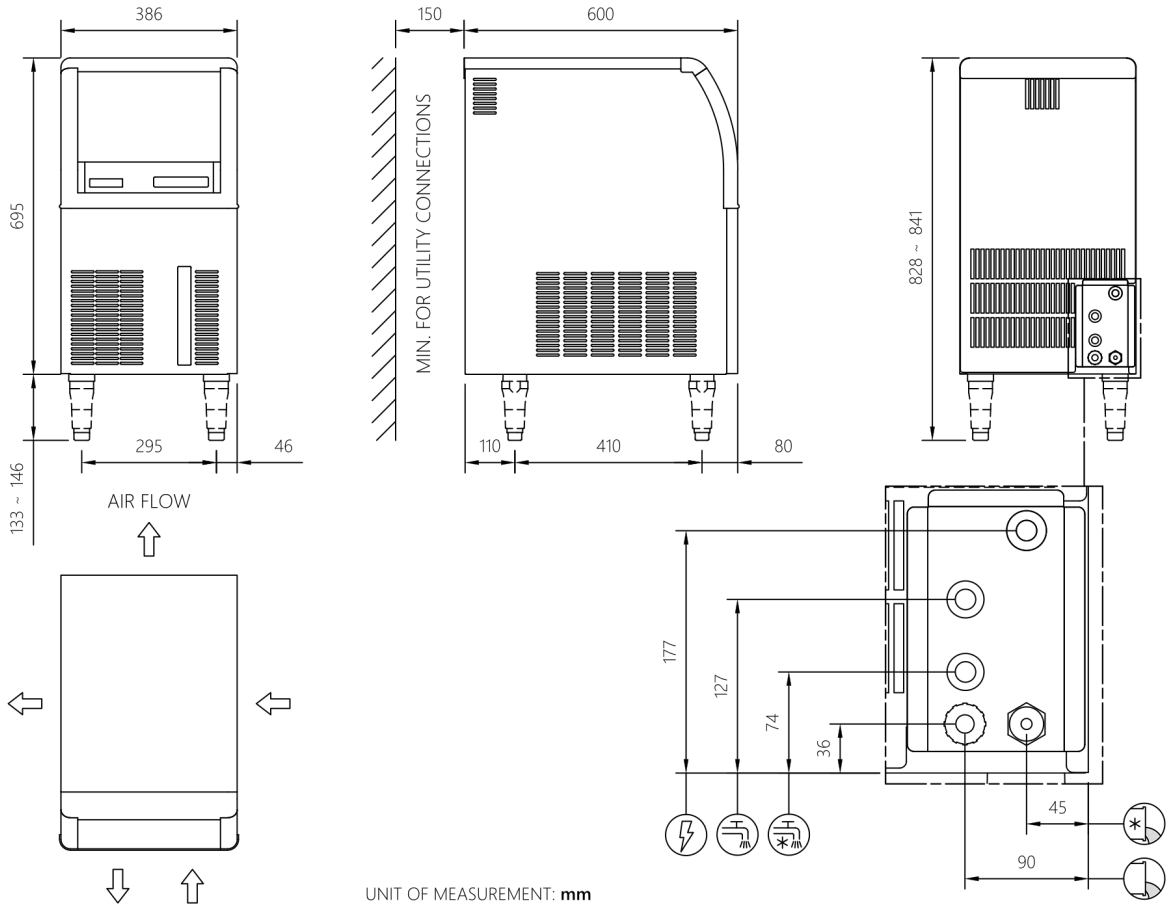

MACHINE DATA	SHIPPING DATA	
Dimensions (LxWxH): 386 x 600 x 695 mm Net weight 39 kg	Dimensions (LxWxH): 46 x 67 x 81 cm Peso netto 43 kg	(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
ECL 57 AS EASY	230\50\1	A	29	28	21	0,60	6,0	4,0	340	1,50	10
ECL 57 WS EASY	230\50\1	W	32	31	25	0,70	6,0	24,0	320	1,50	10
ECM 57 AS EASY	230\50\1	A	33	31	25	0,00	7,0	4,0	370	1,00	10
ECM 57 WS EASY	230\50\1	W	36	31	27	0,00	6,0	23,0	290	1,00	10
ECS 57 AS 230/50/1	230\50\1	A	28	27	22	0,00	7,0	4,0	370	1,50	10
ECS 57 AS EASY	230\50\1	A	28	27	22	0,00	7,0	4,0	370	1,50	10
ECM 57 AS EASY	220-240\60\1	A	34	32	24	0,80	7,0	4,0	400	1,50	10