

Modular Ice Machine 170 kg



Item #:
Project:
Quantity:



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MXG M 437 **Medium Gourmet** 20 g Ø 30 x H 34 mm

CONDENSING SYSTEM	RECOMMENDED BINS						
	Head	Bins	kg				
Air cooled		~	SB393	181			
	MXG 437	~	SB530	243			
		BINTOPMXGSB55	SB550	252			
REFRIGERANT GAS		•	UBH1600	812			
		•	SIS1350	613 + 73 + 73			

R290

VOLTAGE V/Hz/ph

230/50/1

Electrical voltage

LEGEND:

✓: Perfect combination between ice maker and bin
 ○: Ice chute cut-out performed upon installation
 CBTxxxxxxxxxx : need additional bin top

CERTIFICATIONS







MinimumMaximumAir temperature1043Water temperature538Water pressure1 bar (14 psi)5 bar (70 psi)

-10%

OPERATING REQUIREMENTS

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals


www.scotsman-ice.it www.scotsman-ice.com +10%

MXG 437 Eco XSafe



Modular Ice Machine 170 kg

Item #:
Project:
Quantity:

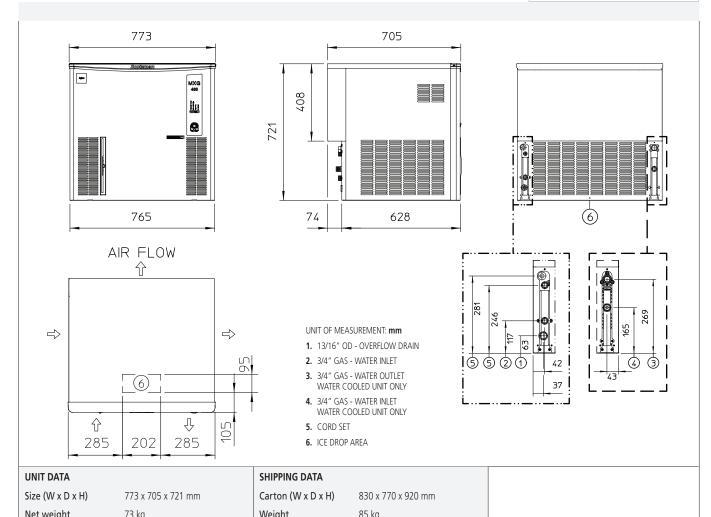

Net Weight 73 kg			weight 65 kg								
		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	w	w	No. x Ømm²	Α
MXGM 437 AS	230/50/1	170	165	135	19.7	26.7	18.0	1400	3620	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions