MXG 437 OX XSafe

Modular ice machine up to 170 kg

Scotsman Ice Systems



CHARACTERISTICS

• A single, solid cube with a truncated cone shape. A true work of art: compact, pure, and crystalline, true to the Scotsman tradition.
• Measurements that meet international standards.
• Electronic controls: your ice will always remain perfect despite the changes in weather.
• External indicator lights that allow you to constantly check the status of your machine.
• Front air condenser filter and easily accessible for quick cleaning.
• Machine cleaning reminder system: a light will remind you to clean the condenser filter.
• XSafe: A completely natural sanitization system integrated into the machine. It works automatically and continuously, keeping the machine clean and sanitized.



MXG S
Little Gourmet 8 g
Ø 21 mm - H 25 mm



MXG M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm



MXG L
LARGE GOURMET 39 g
Ø 38 mm - H 41 mm

Model	Cube	Ø	H	Weight
MXG S	Small	21 mm	25 mm	8 g
MXG M	Medium	30 mm	34 mm	20 g
MXG L	Large	38 mm	41 mm	39 g

CONDENSING SYSTEM

Air condensation
Water condensation

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1
220-240\60\1

RECOMMENDED BIN

Bin	Compatibility
SB 393	√
NB 393	√
SB 530	√
SB 550	SCBINTOPMXGSB55
UBH 1100	•
UBH 1600	•
SIS 700	•
SIS 1350	•

LEGEND
√ : Perfect combination of machine and container
• : Ice drop hole to be cut at installation
CBTxxxxxxxxxx : Additional accessory required

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%

IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

MXG 437 OX *XSafe*

Scotsman Ice Systems

Modular ice machine up to 170 kg

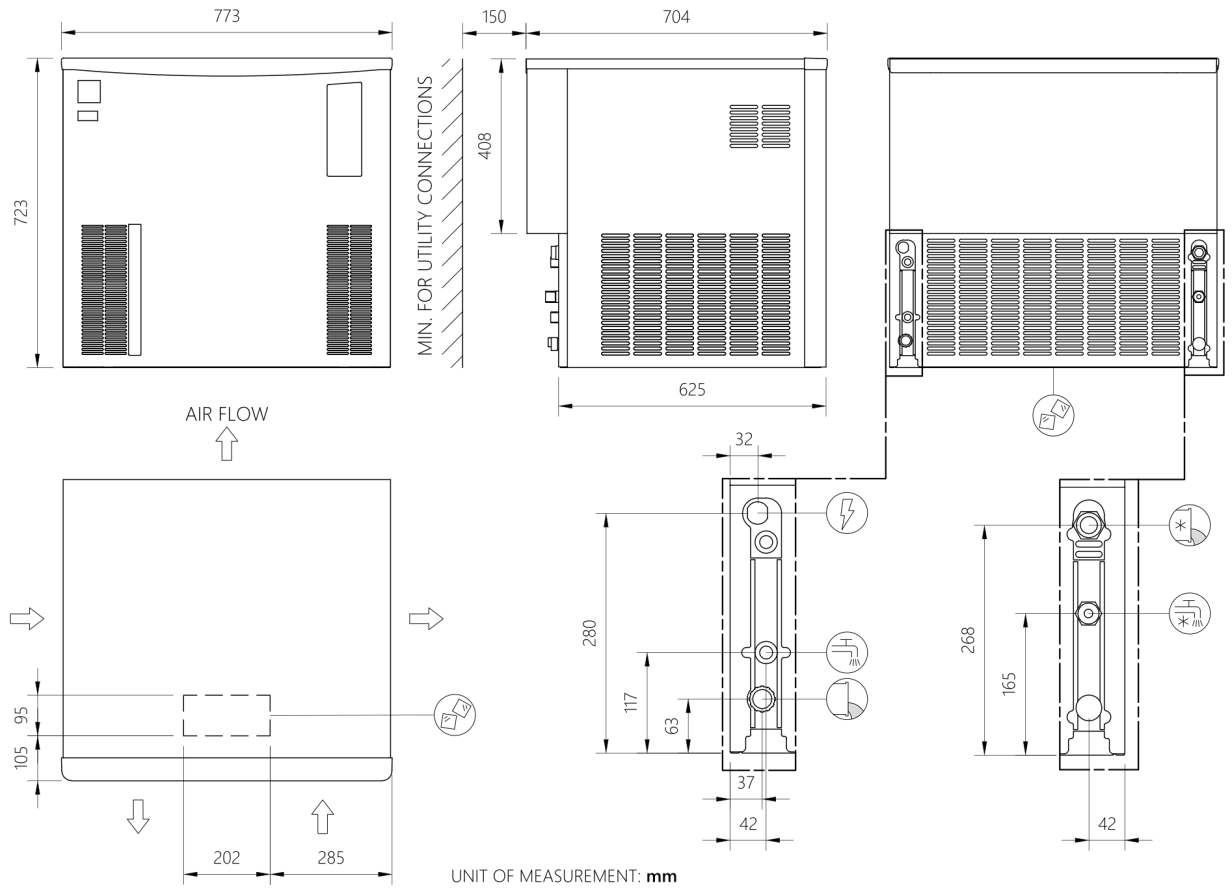

MACHINE DATA	SHIPPING DATA	
Dimensions (LxWxH): 773 x 704 x 721 mm Net weight 74 kg	Dimensions (LxWxH): 83 x 77 x 89 cm Peso netto 85 kg	(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
MXG L 437 AS	230\50\1	A	160	157	130	3,40	27,0	14,0	1400	1,50	10
MXG M 437 AS	230\50\1	A	170	165	135	3,40	27,0	18,0	1400	1,50	10
MXG M 437 WS	230\50\1	W	170	160	120	3,70	25,0	99,0	1080	1,50	16
MXG S 437 AS	230\50\1	A	165	155	135	2,80	26,0	28,0	1400	1,50	10
MXG M 437 AS	220-240\60\1	A	160	155	128	3,00	25,0	25,0	1280	1,50	10
MXG L 437 WS	230\50\1	W	164	154	140	3,70	25,0	109,0	1080	1,50	10