# MXG 938 ASR OX XSafe

Scotsman Ice Systems

## Modular ice maker with a capacity of up to 390 kg



### CHARACTERISTICS

• A single ice cube in the shape of a truncated cone. A true work of art: compact, pure, and crystal-clear, true to the Scotsman tradition.
• Measurements that meet international standards.
• Electronic controls: Your ice will always stay perfect, no matter how the weather changes.
• External indicator lights that allow constant verification of the status of your machine.
• Front-mounted, easily accessible air filter for the condenser, allowing for quick cleaning.
• Machine cleaning warning system: an indicator light will remind to clean the condenser filter.
• XSafe: All-natural, machine-integrated sanitizing system. It acts automatically and continuously keeping the machine clean and sanitized.



**MXG M**
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

| Model | Cubetto | Ø | H | Weight |
|---|---|---|---|---|
| **MXG M** | Medium | 30 mm | 34 mm | 20 g |

### CONDENSATION SYSTEM

Remote condensation

### REFRIGERANT GAS

R452A

### VOLTAGE V/HZ/PH

400\50\3N

### RECOMMENDED CONTAINERS

| Bin | Compatibility |
|---|---|
| SB 393 | √ |
| SB 530 | √ |
| SB 550 | SCBINTOPMXGSB55 |
| SB 948 | SCCBT48EAMCD000 |
| SB1025 | SCCBT52EAMCD000 |
| UBH 1100 | • |
| UBH 1600 | • |
| SIS 700 | • |
| SIS 1350 | • |

LEGEND
√ : Perfect combination of machine and container
• : Ice drop hole to be cut at installation
CBTxxxxxxxxxx : Additional accessory required

### CERTIFICATIONS

### OPERATIONAL REQUIREMENTS

| | Minimum | Maximum |
|---|---|---|
| Air temperature | 10 | 43 |
| Water temperature | 5 | 38 |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Voltage | -10% | +10% |

IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

# MXG 938 ASR OX XSafe

Scotsman Ice Systems

## Modular ice maker with a capacity of up to 390 kg

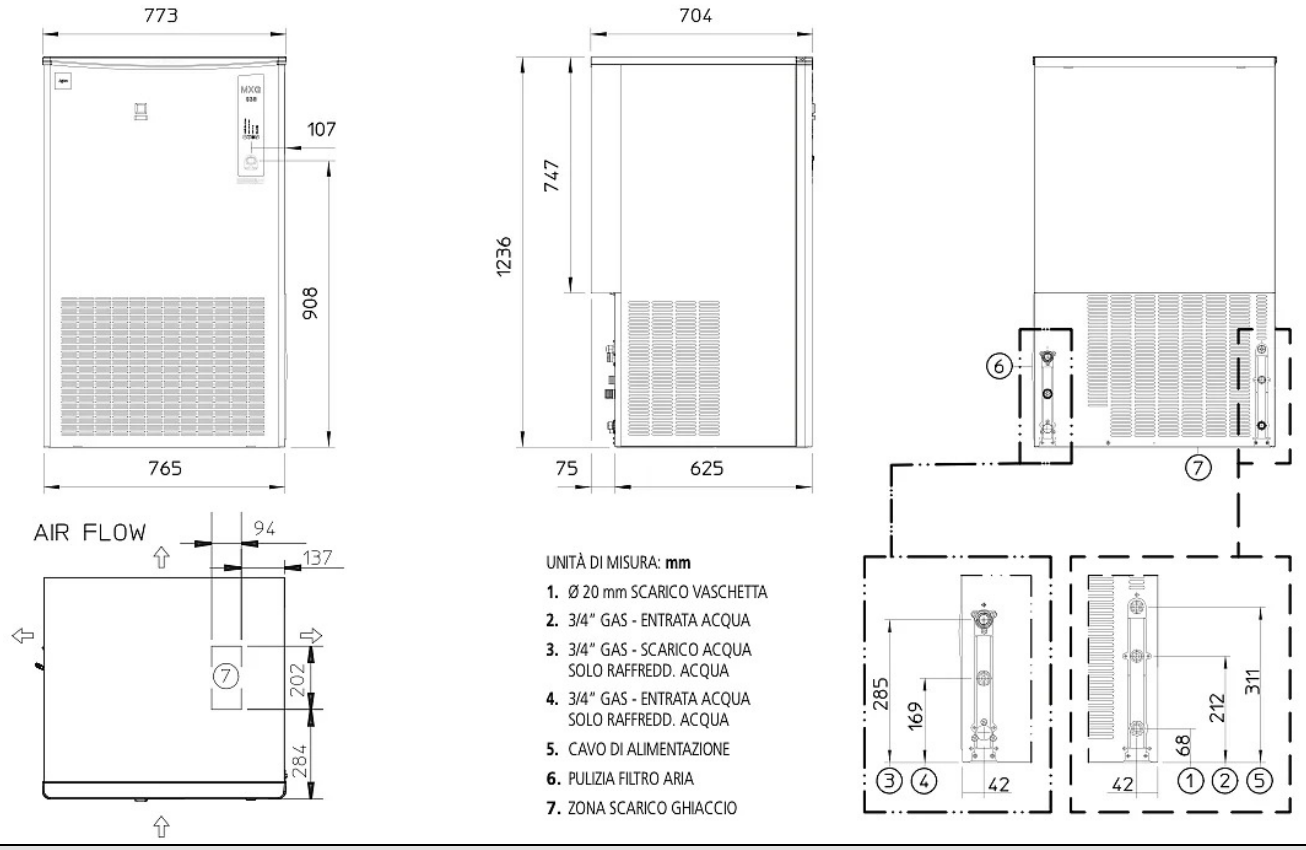


MACHINE DATA
Dimensions (LxWxH): 773 x 705 x 1236 mm
Net weight 119 kg

SHIPPING DATA
Dimensions (LxWxH): 83 x 77 x 143 cm
Net weight 138 kg

(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

| | | | Ice production kg in 24 h °C Ambient / °C Water | | | Heat dispersion | Consumo Energia (*) | Consumption Water (*) | Instant power | Cables | Fuse |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Version | Voltage | Condensation | 10°C/10°C | 21°C/10°C | 32°C/21°C | kW | kWh/24h | l/h | W | No. x Ømm² | A |
| MXG L 938 AS | 400\50\3N | R | 335 | 325 | 290 | 0,00 | 67,0 | 37,0 | 16700 | 1,50 | 16 |
| MXG M 938 AS | 400\50\3N | R | 390 | 365 | 320 | 0,00 | 70,0 | 37,0 | 3550 | 1,50 | 16 |