Modular Ice Machine 1650 kg

MAR 208

Scotsman[®] Ice Systems

Modular	lce	Machine	1650	kc
Modalai		IVIGCIIIIIC	1050	1

Item #:
Project:
Quantity:



FEATURES

- Scale ice machine, in "split system" version; built-in unit. Storage bin not supplied, to be purchased separately.
- To be connected to condensing unit or central cooling system (low temperature).
- AISI304 Stainless steel evaporator and ice scraper blade. Redesigned evaporator compartment end-walls.
- Redesigned evaporator compartment end-walls, electromechanical control panel.
- Electromechanical control panel. Electrical protections, rotation speed & reverse phase controls.
- Low- water sensor protection. Storage bin thermostatic ice level sensor. Drive motor / gear reducer with V-Belt drive.
- Stainless steel panels in scotch-brite finish, with rounded corners, easy to remove for maintenance.
- Supplied w/expansion valve, solenoid valve, pressure regulating valve (KVP), heat exchanger.

		CONDENSING	CONDENSING RECO	ECOMMI	MMENDED BINS			
		SYSTEM	Head	Bins		kg		
		SPLIT		•	UBH1600	812		
			MAR 208	•	UBH2250	1068		
		REFRIGERANT		•	SIS1350	613 + 73 + 73		
Scale i Residu	MAR 208 Scale ice Residual water content 2% Thickness 2 mm	GAS R404A R452A						
		VOLTAGE V/Hz/ph						
		230/60/1 400/50/3N	LEGEND: ✓: Perfect com •: Ice chute cu CBTxxxxxxxxxx:	bination bet t-out perforr need addition	ween ice maker ned upon instal onal bin top	and bin lation		
CERTIFIC ATIONS								

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	+10

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**Apple store
Google play
Windows store

www.scotsman-ice.it www.scotsman-ice.com


UNIT DATA

MAR 208

Scotsman° Ice Systems

Modular Ice Machine 1650 kg

Item #:
Project:
Quantity:

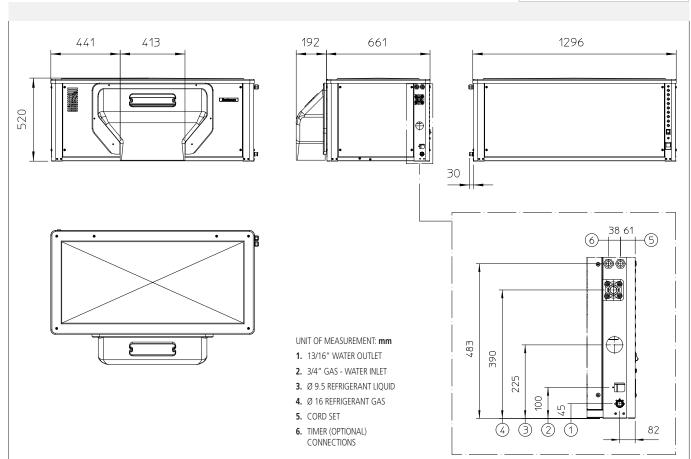

Size (W x D x H)	D x H) 1326 x 853 x 520 mm		Carton (W x D x H) 1410 x 790 x 680 mm								
Net weight 175 kg			Weight	199 kg			All data refer to R404A refrigerant models				
24 h ice production of Amb. / °C Wa			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size		
Version Voltage	V-14	10°C/10°C	21°C/10°C	32°C/21°C	kWh/	kWh/	I/h	w	w	N 6	
	voitage	2 mm	2 mm	2 mm	100 kg	24h				No. x Ømm²	A
MAR 208 SPLIT	400/50/3N	1650	0	0	1.2	9.6	54.2	395	9850	5 x 2.5	10
MAR 208 SPLIT	230/60/1	0	0	0	1.2	9.6	54.2	395	9850	3 x 2.5	10

SHIPPING DATA

Compressor: (Te -20.0°C; Tc +40.0°C)

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions