MFN 47 OX XSafe

Modular ice maker with a capacity of up to 270 kg

310 kg



FEATURES

- Air- or water-cooled condenser.
- Stainless steel evaporator.
- Electronic control of major functions and safeties.
- A state-of-the-art icebreaker made of a special alloy that produces very dry ice (up to 92%).
- Long-lasting stainless steel ball bearings.
- Dual Protection - Electronic Control of the Drive Shaft Rotation Speed.
- Water level and gear reducer protection sensor; optical level sensor for machine shutdown.
- It requires a separate container to collect the ice it produces.
- XSafe: A completely natural sanitization system built into the machine. It operates automatically and continuously, keeping the machine clean and sanitized.



MFN S 47
Nugget Small 1 g
Ø 11 x H 13 mm

CONDENSATION SYSTEM

Air

Water

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

220-240\60\1

RECOMMENDED CONTAINERS

Container	Compatibility
SB 193 NB 193	SCCBT22EFCD0000
SB 322	SCCBT22EFCD0000
SB 393 NB 393	SCCBT30EFSD0000
SB 530	SCCBT30EFSD0000
SB 550	SCCBT42EFSD0000
SB 948	SCCBT48FMCD0000
SB1025	SCCBT52FMCD0000
UBH 1100	•
SIS 300	•
SIS 700	•

LEGEND

√ : Perfect combination of machine and container

• : Hole for falling ice—to be cut during installation

CBTxxxxxxxxx: Additional accessory required

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water Temperature	5	38
Water Pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%

IMPORTANT NOTE

Models and specifications are subject to change without notice. The spec sheet is intended for marketing purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

Rev. 16/10/2026

MFN 47 OX *XSafe*

Scotsman Ice Systems

Modular ice maker with a capacity of up to 270 kg
310 kg

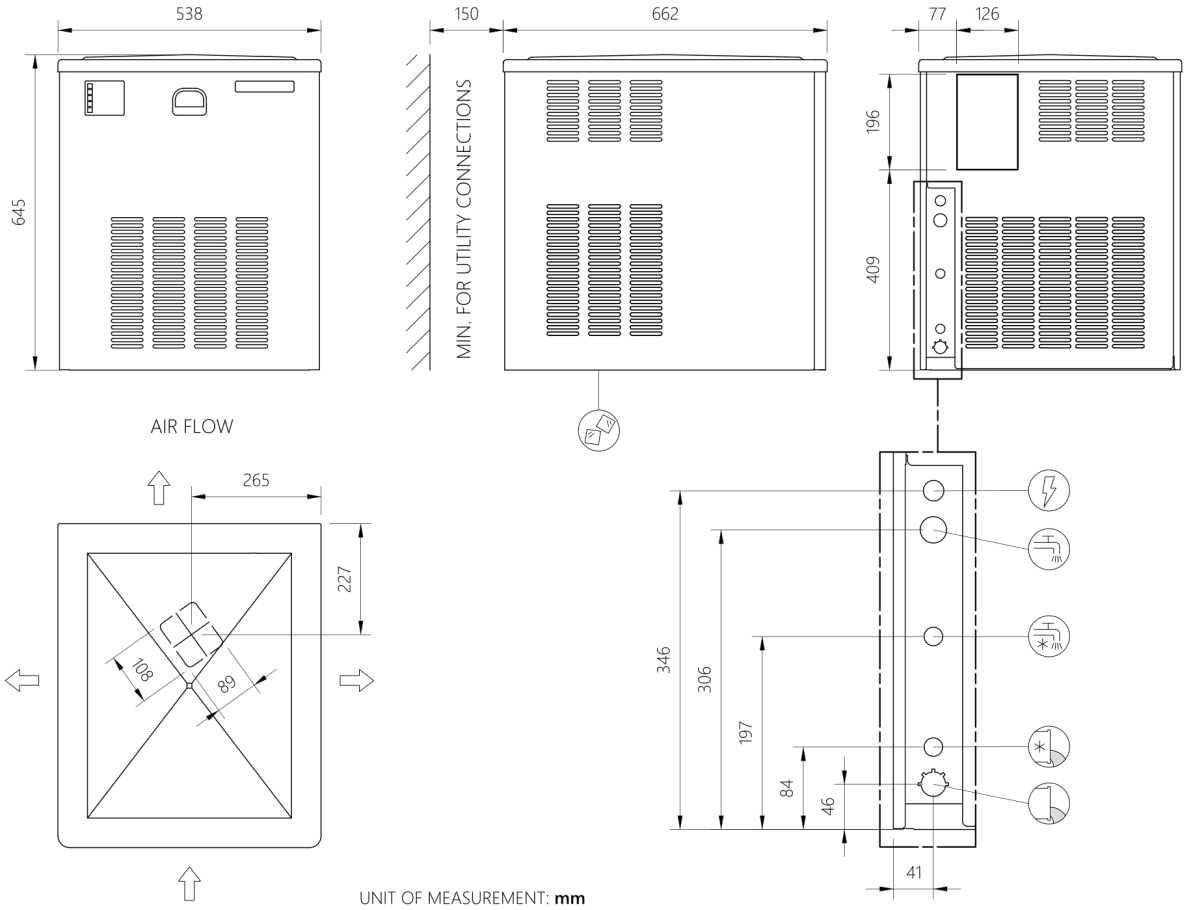

MACHINE SPECIFICATIONS	SHIPPING INFORMATION	
Dimensions (WxDxH): 538 x 663 x 645 mm Net weight 79 kg	Dimensions (WxDxH): 61 x 76 x 82 cm Net weight 86 kg	(*) The data are based on the following temperature conditions: 32°C ambient / 21°C water

			Ice Production (kg) in 24 Hours Ambient °C / Water °C			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instantaneous power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
MFNM 47 AS 230/50/1	230\50\1	A	269	241	208	1,90	22,0	9,0	1000	1,50	16
MFNS 47 AS 220-240/60/1	220-240\60\1	A	310	295	239	2,50	28,0	11,0	1250	1,50	10