


Model: **CPG21A**

**Gravity**

PROVER RETARDER CABINET - SERIE GRAVITY - TEMP. -20 / +35 °C - 20 X EN2. AIR CONDENSING UNIT



-20 °C | + 35 °C

Fresh or frozen



Easy to use




Always leavened perfect




Everything is always under control



Always guaranteed results



Ergonomics



Experience at your service



ECOLOGICAL REFRIGERANT GAS



**COMMANDS, CONTROLS AND SAFETY DEVICES**

- HACCP alarm management.
- Connectivity with Wi-Fi remote control.
- The know-how of the best experts at your disposal
- Temperature range -20°C / +35°C
- 7" touch screen color display with control interface
- Ventilation control with 5 variable speeds
- Cell humidity management via hygrometric probe
- Controls positioned on the front door

**STRUCTURAL CHARACTERISTICS**

- Monoblock construction.
- Internal stainless steel.
- External Scotch Brite satin finish stainless steel.
- 80 mm-thick insulation.
- High density CFC and HCFC-free PU insulation (42 kg/m<sup>3</sup>).
- Ergonomic stainless steel handle.
- Self-closing doors with opening position block at 100° and magnetic gaskets on all 4 sides.
- Silk-screened tempered glass easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Rounded cell corners for easy cleaning.
- Indirect ventilation thanks to the full-length duct system for optimal air circulation and uniform temperature distribution.
- Integrated LED lighting on the dashboard.
- Locking fixtures.

**REFRIGERANT GROUP**

- Monoblock ceiling system with an evaporator outside the cold room to allow for the exploitation of the entire refrigerated volume.
- Automatic defrost and defrost water self evaporating without the use of energy.
- Tropicalized group (class "T" 43°C).
- Climate class 5.
- R452a ecological refrigerant gas

**STANDARD EQUIPMENT**

**WI-FI:** WI-FI CONNECTION  
**IOTK:** CONNECTIVITY KIT  
**20-CGL:** N. 20 COUPLE OF L-SHAPED SLIDES

**OPTIONAL TO BE REQUESTED WHEN ORDERING**

**TS-AVPG:** AC 208/230 V - 60 HZ  
**SKRT-AVPG:** WHEEL KIT WITH BRAKE  
**SCGL-EN2-730:** "L" SLIDES PAIR - EN2 - L=730 - AISI 304  
**SZC-EN2:** CLOSING PLINTH

**EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE**

**CGL-EN2-730:** "L" SLIDES PAIR - EN2 - L=730 - AISI 304  
**IOTC-3:** COLDCLOUD CONNECTION FEE - 3 YEARS  
**IOTC-1:** COLDCLOUD CONNECTION FEE - 1 YEAR  
**KRT-AVPG:** WHEEL KIT WITH BRAKE  
**ZC-EN2:** CLOSING PLINTH

#### DIMENSIONS

Width	mm	780
Depth	mm	1080
Height	mm	2090
Door Span Width	mm	620
Internal Depth	mm	835
Door Span Height	mm	1442
Package width	mm	820
Package depth	mm	1120
Package height	mm	2240
Package volume	m <sup>3</sup>	2,06
Weight	Kg	240
Weight with package	Kg	250

#### TECHNICAL DATA

Working temperature	°C	-20/+35
Motor		Air condensing unit
Climate class		Classe 5
GWP - Global Warming Potential		2141
Refrigerant - Type		R452A
Refrigerant - Quantity	g	630


#### CAPACITY

Capacity		20 x EN2
----------	--	----------

#### POWER SUPPLY

Max electric power	kW	2,428
Cooling power	kW	0,814
Max consumption	A	11,7
Power supply voltage	V	230
Electrical_Phase		1
Frequency	Hz	50

\* BT - Evap. temp. -25°C / Cond. temp. +45°C.

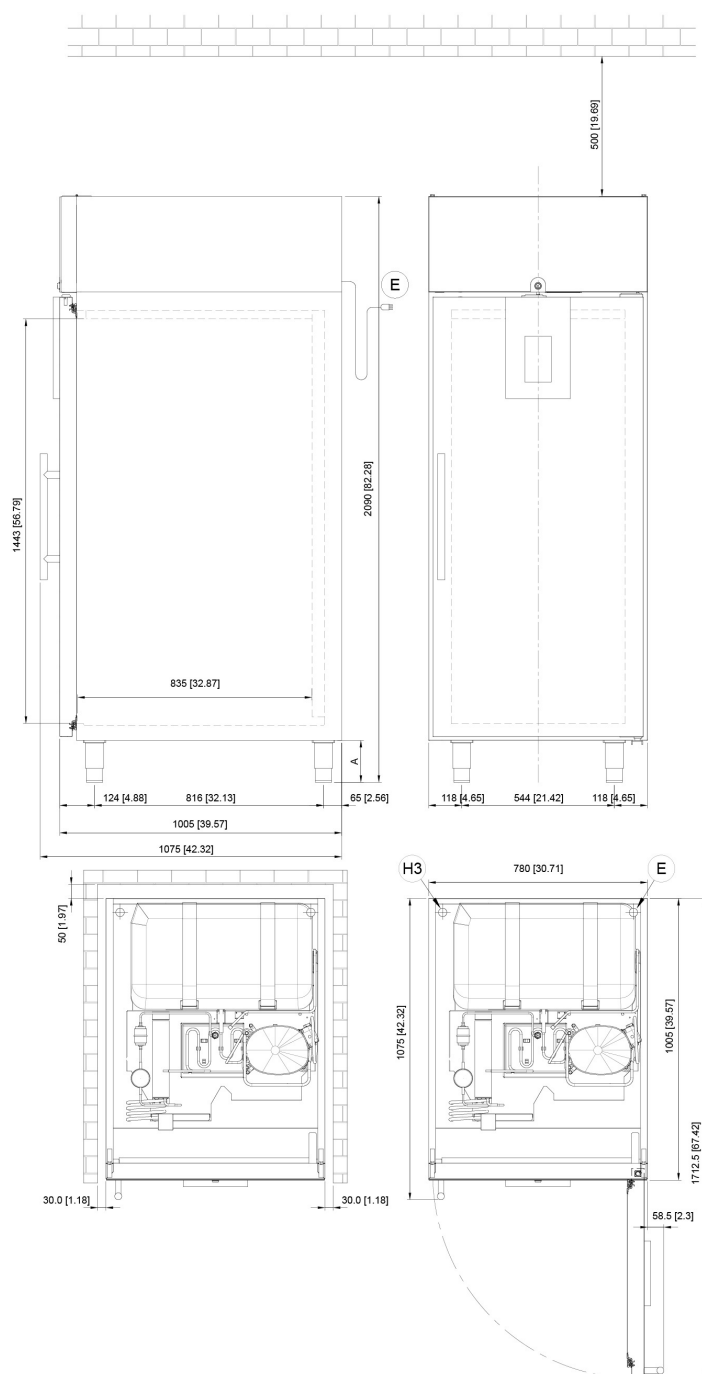

DIMENSIONI mm  
DIMENSIONS [in]

A = 140 / 200 PIEDINI - FEET  
A = 155 RUOTE  $\varnothing$  100 - CASTORS  $\varnothing$  100

- Ⓔ IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA  
EN - ELECTRICAL POWER SUPPLY CABLE INLET  
FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE  
DE - ANSCHLUß STROMKABEL  
ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA  
RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ

- Ⓕ CONNESSIONE INGRESSO ACQUA UMIDIFICATORE  
HUMIDIFIER WATER INLET CONNECTION