EC 207 OX XSafe

Self Contained Ice machine up to 145 kg



CHARACTERISTICS

• Production of single Gourmet cubes with a truncated cone shape.
• External finish in stainless steel.
• Electronic control.
• Front airflow for air-cooled model for undercounter installations.
• Easy-access front ON/OFF switch.
• PWD - Progressive Water Discharge: Pumps excess residual water up to a distance of 15 metres.
• XSafe: A completely natural sanitization system integrated into the machine. It works automatically and continuously, keeping the machine clean and sanitized.



EC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm



EC L
LARGE GOURMET 39 g
Ø 38 mm - H 41 mm

Model	Cube	Ø	H	Weight
EC M	Medium	30 mm	34 mm	20 g
EC L	Large	38 mm	41 mm	39 g

CONDENSING SYSTEM

Air condensation
Water condensation

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

BIN CAPACITY

KG
50

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

EC 207 OX *XSafe*

Scotsman Ice Systems

Self Contained Ice machine up to 145 kg

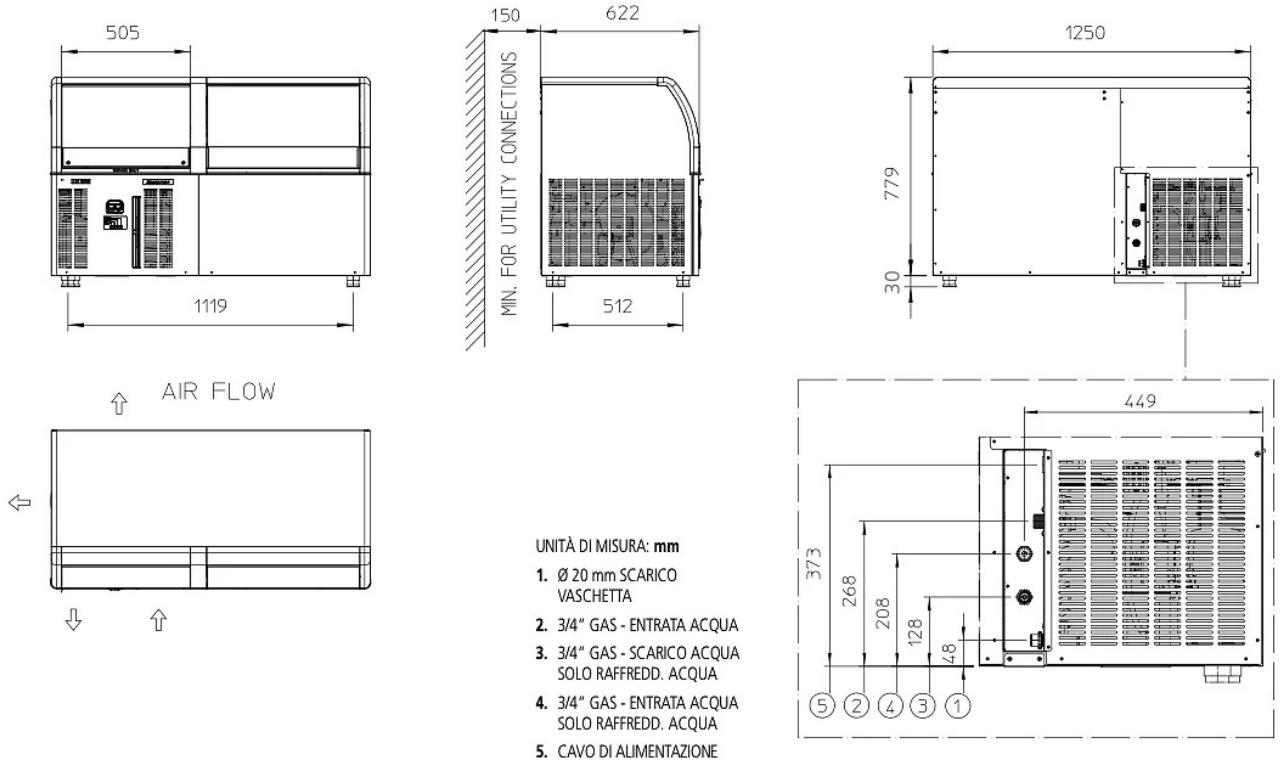

UNITÀ DI MISURA: **mm**

1. Ø 20 mm SCARICO VASCHETTA
2. 3/4" GAS - ENTRATA ACQUA
3. 3/4" GAS - SCARICO ACQUA SOLO RAFFREDD. ACQUA
4. 3/4" GAS - ENTRATA ACQUA SOLO RAFFREDD. ACQUA
5. CAVO DI ALIMENTAZIONE

MACHINE DATA	SHIPPING DATA	
Dimensions (LxWxH): 1250 x 620 x 860 mm Net weight 82 kg	Dimensions (LxWxH): 132 x 69 x 96 cm Peso netto 96 kg	(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
ECL 207 AS EASY	230\50\1	A	135	130	105	2,10	22,0	13,0	1170	1,50	10
ECL 207 WS EASY	230\50\1	W	140	138	135	2,60	18,0	150,0	850	1,50	10
ECM 207 AS EASY	230\50\1	A	145	150	115	2,10	22,0	18,0	1170	1,50	10
ECM 207 WS EASY	230\50\1	W	150	147	135	2,60	18,0	151,0	850	1,50	10