EC 227 OX XSafe

Self Contained Ice machine up to 165 kg



CHARACTERISTICS

• Production of single Gourmet cubes with a truncated cone shape.
• External finish in stainless steel.
• Electronic control.
• Front airflow for air-cooled model for undercounter installations.
• Easy-access front ON/OFF switch.
• PWD - Progressive Water Discharge: Pumps excess residual water up to a distance of 15 metres.
• XSafe: A completely natural sanitization system integrated into the machine. It works automatically and continuously, keeping the machine clean and sanitized.



EC S
Little Gourmet 8 g
Ø 21 mm - H 25 mm



EC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm



EC L
LARGE GOURMET 39 g
Ø 38 mm - H 41 mm

Model	Cube	Ø	H	Weight
EC S	Small	21 mm	25 mm	8 g
EC M	Medium	30 mm	34 mm	20 g
EC L	Large	38 mm	41 mm	39 g

CONDENSING SYSTEM

Air condensation
Water condensation

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1
220-240\60\1

BIN CAPACITY

KG
70

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

EC 227 OX *XSafe*

Scotsman Ice Systems

Self Contained Ice machine up to 165 kg

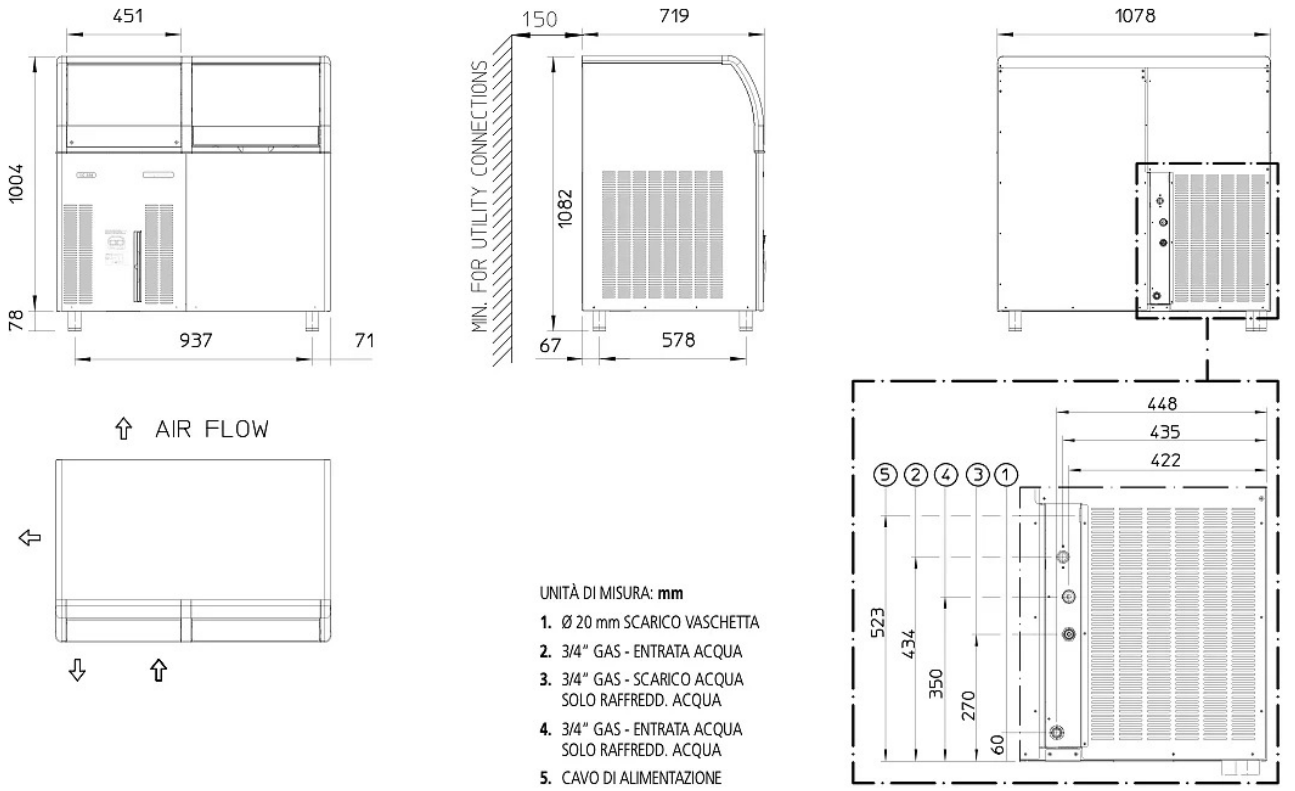

MACHINE DATA	SHIPPING DATA	
Dimensions (LxWxH): 1078 x 715 x 1083 mm Net weight 99 kg	Dimensions (LxWxH): 115 x 78 x 116 cm Peso netto 116 kg	(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
ECL 227 AS EASY	230\50\1	A	150	145	130	2,80	28,0	14,0	1400	1,50	10
ECL 227 WS EASY	230\50\1	W	150	145	130	3,60	24,0	181,0	1075	1,50	10
ECM 227 AS EASY	220-240\60\1	A	170	165	135	2,80	26,0	20,0	1385	1,50	10
ECM 227 AS EASY	230\50\1	A	165	160	130	2,80	28,0	21,0	1400	1,50	10
ECM 227 WS EASY	230\50\1	W	170	165	150	3,60	24,0	168,0	1075	1,50	10
ECS 227 AS	230\50\1	A	164	159	121	2,90	30,0	22,0	1530	1,50	10