

NU 227 XSafe

Self Contained Ice Machine 105 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NU 227
Dice 10 g
W 22 x D 22 x H 22 mm



NU H 227
Half Dice 6 g
W 10 x D 22 x H 28 mm



NU L 227
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

37 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

| | Minimum | Maximum |
|--------------------|----------------|----------------|
| Air temperature | 10 | 40 |
| Water temperature | 5 | 35 |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.


www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 105 kg

NU 227 XSafe

Self Contained Ice Machine 105 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |

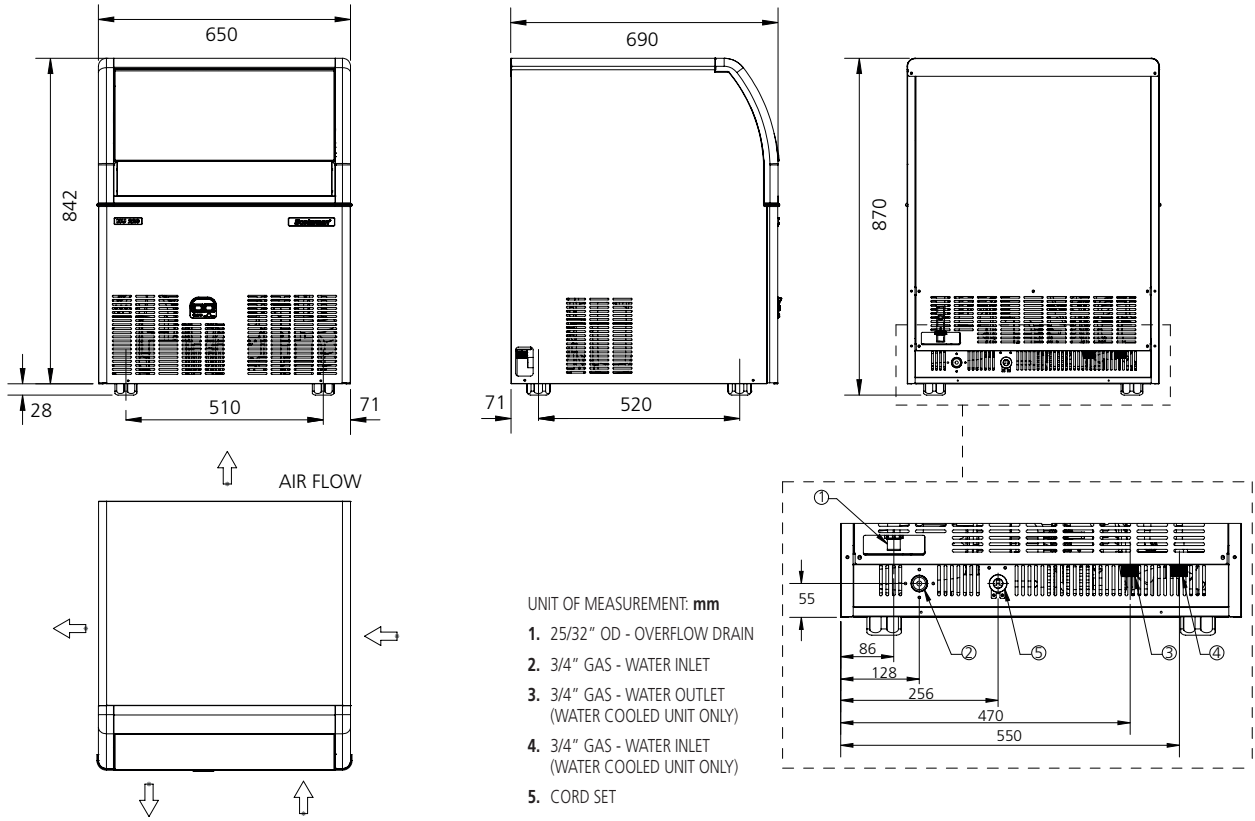

Self Contained Ice Machine 105 kg

| UNIT DATA | | SHIPPING DATA | | (*) Data refer to 32°C Amb. / 21°C Water temperature conditions | | | | | | | |
|------------------|--------------------|---|---------------------|---|------------------------|---------|-----------------|---------------|------------|---------------|----------------|
| Size (W x D x H) | 650 x 690 x 870 mm | Carton (W x D x H) | 730 x 770 x 1015 mm | | | | | | | | |
| Net weight | 63 kg | Weight | 77.5 kg | | | | | | | | |
| | | 24 h ice production kg °C Amb. / °C Water | | | Energy consumption (*) | | Water usage (*) | Instant power | Compressor | Circuit wires | Max. fuse size |
| Version | Voltage | 10°C/10°C | 21°C/10°C | 32°C/21°C | kWh/100 kg | kWh/24h | l/h | W | W | No. x Ømm² | A |
| NU 227 AS | 230/50/1 | 105 | 95 | 68 | 15.4 | 10.5 | 5.5 | 480 | 670 | 3 x 1.5 | 10 |
| NUH 227 AS | 230/50/1 | 104 | 95 | 71 | 15.1 | 10.7 | 7.5 | 480 | 670 | 3 x 1.5 | 10 |
| NUL 227 AS | 230/50/1 | 105 | 93 | 68 | 15.4 | 10.5 | 7.1 | 480 | 670 | 3 x 1.5 | 10 |