NU 157 OX XSafe

Ice maker with built-in bin, up to 89 kg



CHARACTERISTICS

• Front-airflow design for an air-cooled model intended for under-counter installation.
• Durable stainless steel exterior.
• Front access to the air filter condenser for a cleaning process that saves time and money.
• Ergonomic access to the ice with a retractable sliding door: the one-touch lift makes the bartender's job much easier.
• A light indicator for routine maintenance is visible on the front panel.
• Built-in storage compartment: allows for lower-profile installations, resulting in more adaptable and simpler solutions.
• XSafe: A completely natural sanitization system built into the machine. It operates automatically and continuously, keeping the machine clean and sanitized.

NU

-



NU M
Says medium cube 10 g
- H 22 mm

Model	Cubetto	Ø	H	Weight
NU				
NU M	Medium		22 mm	10 g

CONDENSATION SYSTEM
Air

REFRIGERANT GAS

VOLTAGE V/HZ/PH
230\50\1

BIN CAPACITY

KG
20

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

NU 157 OX *XSafe*

Scotsman Ice Systems

Ice maker with built-in bin, up to 89 kg

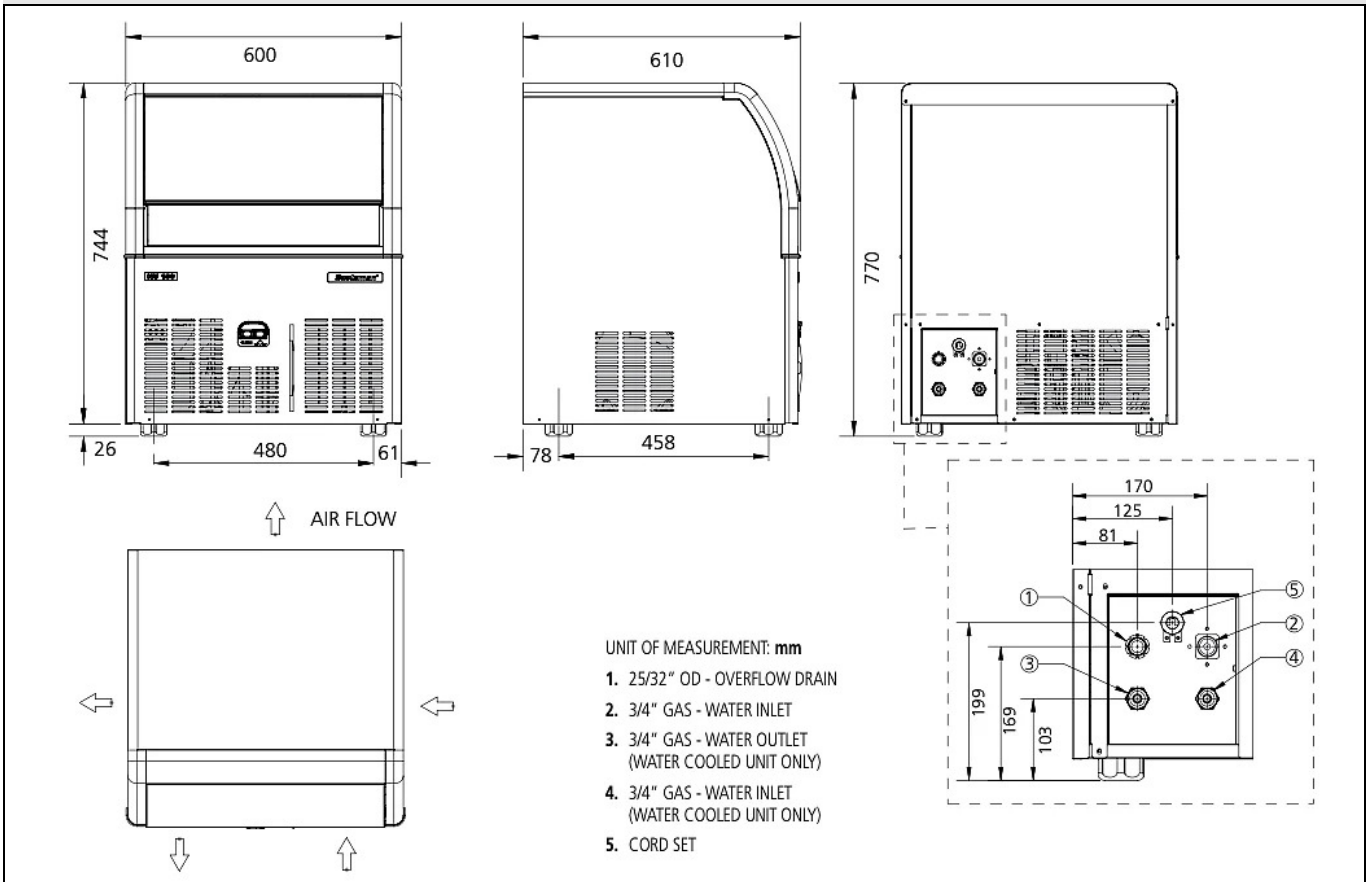

MACHINE DATA	SHIPPING DATA	
Dimensions (LxWxH): 600 x 610 x 770 mm Net weight 54 kg	Dimensions (LxWxH): 68 x 67 x 91 cm Net weight 68 kg	(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
NU 157 AS	230\50\1	A	85	75	57	0,00	0,0	0,0		1,50	10
NUH 157 AS	230\50\1	A	89	80	58	0,00	0,0	0,0		1,50	10
NUL 157 AS	230\50\1	A	87	78	55	0,00	0,0	0,0		1,50	10