

# EXG 307

## Self Contained Ice Machine 150 kg

**Scotsman®**  
Ice Systems

Item
Project
Quantity



### FEATURES

- Crystal clear Gourmet® solid ice cubes
- Meets ENERGY STAR and LEED Eligibility Criteria
- SELF SANITATION System XSafe®
- Natural refrigerant R290 with GWP 3 and ODP 0
- Total FRONT VENTILATION made for BULT-IN installation
- Stylish black colour finishing
- Integrated DRAIN PUMP (no need for gravity drain)
- User friendly internal cleaning, no tools needed
- Remote service support capability with XWave free App.
- Delayed automatic start
- 3D ventilation grid with removable air filter
- Magnetic scoop holder



EXG M  
Medium Gourmet 20 g  
Ø 30 mm - H 34 mm

**CONDENSING SYSTEM**  
air cooled

**REFRIGERANT GAS**  
R290

**VOLTAGE V/HZ/PH**  
230\50\1

Model	Cube	Ø	H	Weight
EXG M	Medium	30 mm	34 mm	20 g

### OPERATING REQUIREMENTS

**CERTIFICATIONS**

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Self Contained Ice Machine 150 kg

September 2025


# EXG 307

## Self Contained Ice Machine 150 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 150 kg

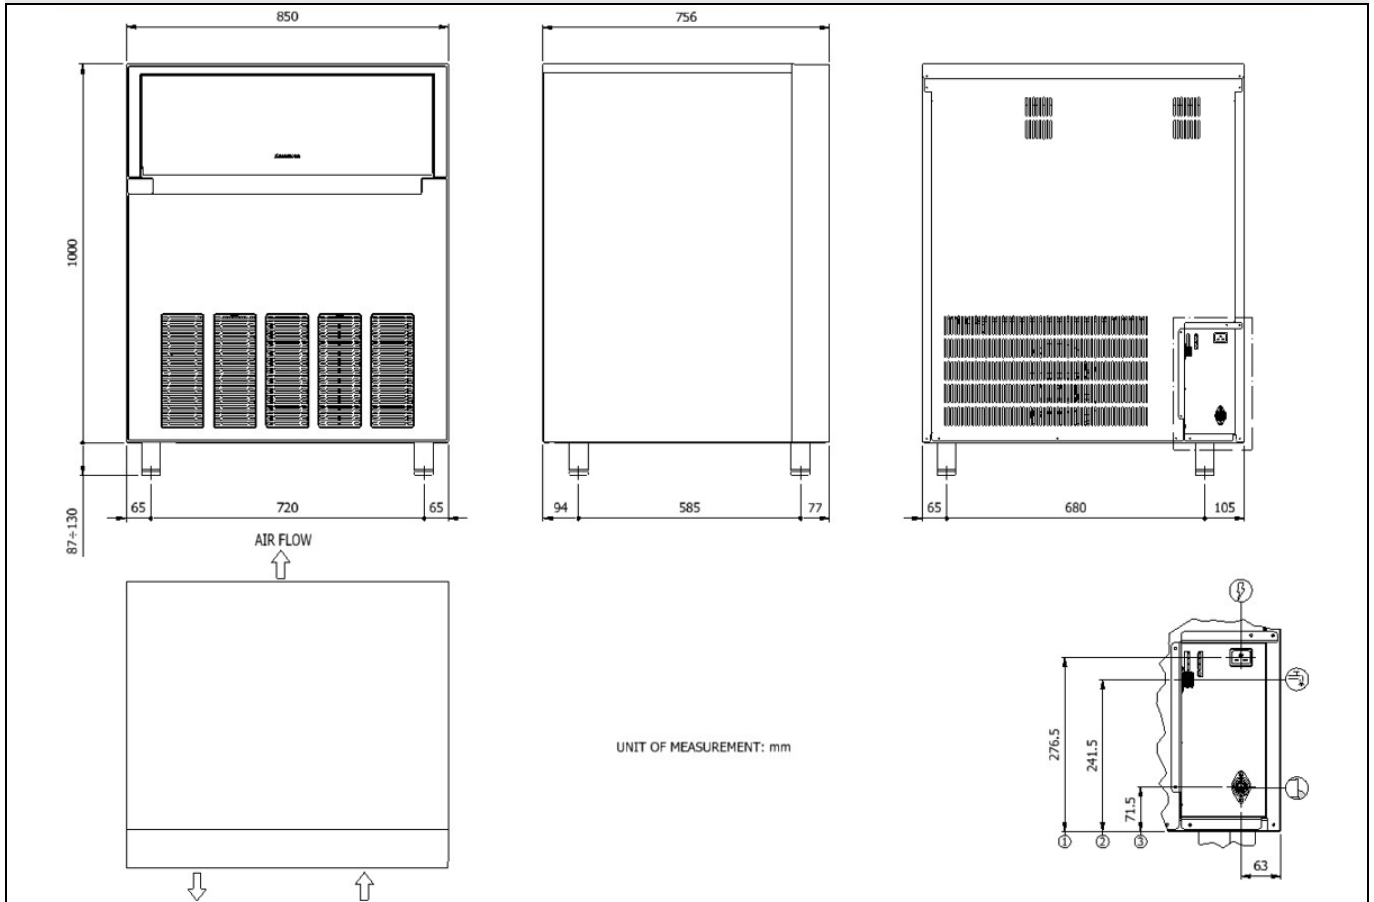

<b>UNIT DATA</b>			<b>SHIPPING DATA</b>				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)										
850 x 756 x 1000 mm			920 x 825 x 1160 mm										
Net weight			Gross weight										
95 kg			110 kg										
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/ 24h	l/h	W	No. x Ømm <sup>2</sup>	A	
EXGM 307 A	230\50\1	A	kg	kg	kg	72	2,5	20,6	12,5	1080	3 x 1,5		10