

EXS 167

Self Contained Ice Machine 79 kg

Scotsman®

Item
Project
Quantity



FEATURES

- Stainless steel finishing
- Front access for easier maintenance.
- Built-in storage bin: allows most undercounter installations for easier fit-in solutions.
- Reduced dimensions
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- SELF SANITATION System XSafe®
- Optimum ratio between ice production and bin capacity
- Low power and water consumption
- R290 refrigerant
- Electronic control board



EXS
Square Gourmet 27 g
Ø 30 mm - H 30 mm

CONDENSING SYSTEM
air cooled

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it

Self Contained Ice Machine 79 kg

October 2025


EXS 167

Self Contained Ice Machine 79 kg

Scotsman®

Item
Project
Quantity

Self Contained Ice Machine 79 kg

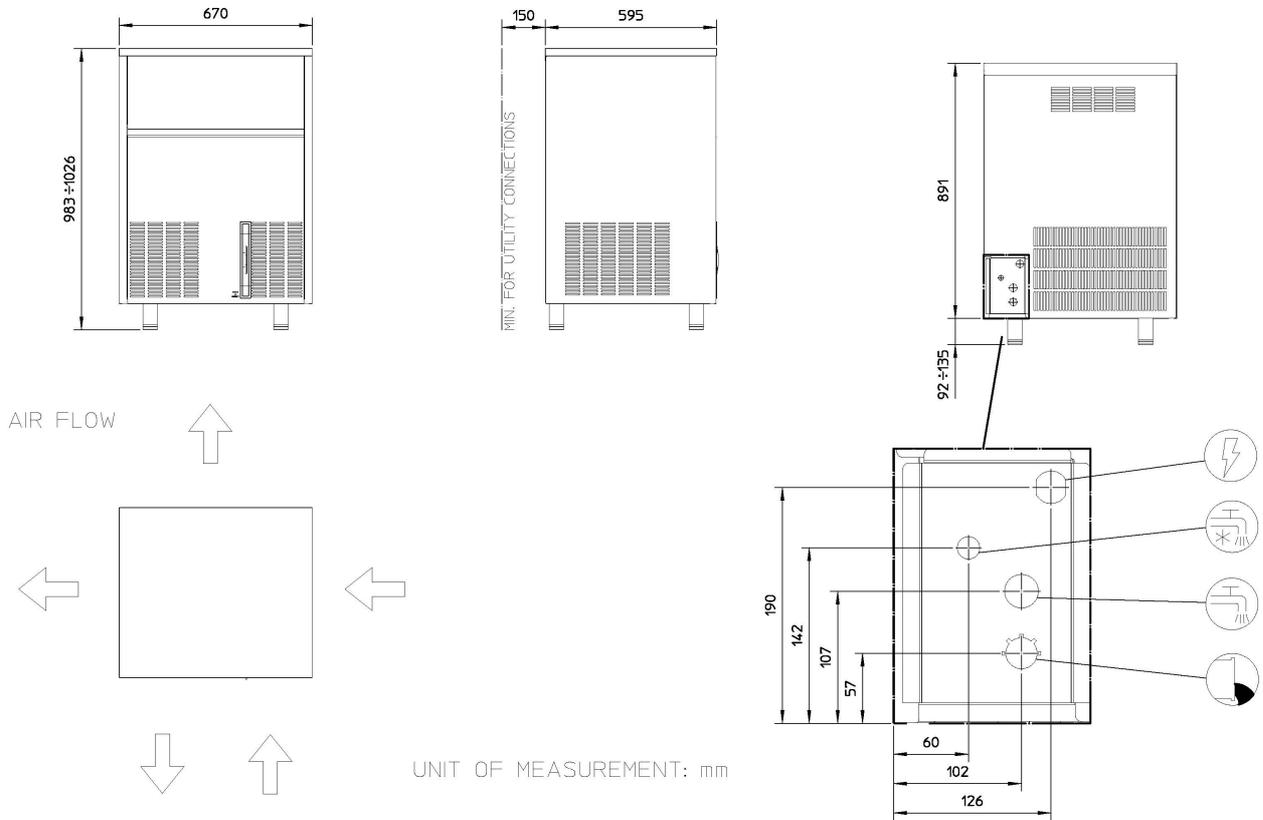

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)									
670 x 595 x 893 mm			740 x 670 x 1080 mm									
Net weight			Gross weight									
63 kg			76 kg									
			24 h ice production kg			Cap	Heat	Energy	Water	instant power	circuit wires	Max. Fuse Size
			C Amb. / °C Water			bin	Rejection	Consumption	Usage (*)			
			10°C/10°C	21°C/10°C	32°C/21°C			(*)				
			kg	kg	kg	kg	kW	kWh/	l/h	W	No. x Ømm ²	A
							24h					
Version	Voltage	Condensation	79	68	51	33	1,5	15	9	750	3 x 1,0	10
EXS 167 AS	230\50\1	A										

Milano

Madrid

Chicago

Dubai

Singapore

Shanghai

Johannesburg