

# EXS 167

Self Contained Ice Machine 77 kg

**Scotsman®**

Item
Project
Quantity



## FEATURES

- Stainless steel finishing
- Front access for easier maintenance.
- Built-in storage bin: allows most undercounter installations for easier fit-in solutions.
- Reduced dimensions
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- SELF SANITATION System XSafe®
- Optimum ratio between ice production and bin capacity
- Low power and water consumption
- R290 refrigerant
- Electronic control board



EXS  
Square Gourmet 24g  
30x30x30 mm

**CONDENSING SYSTEM**  
air cooled

**REFRIGERANT GAS**  
R290

**VOLTAGE V/HZ/PH**  
230\50\1

## CERTIFICATIONS



## OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

### IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)

Self Contained Ice Machine 77 kg

May 2026


# EXS 167

## Self Contained Ice Machine 77 kg

**Scotsman®**

Item
Project
Quantity

Self Contained Ice Machine 77 kg

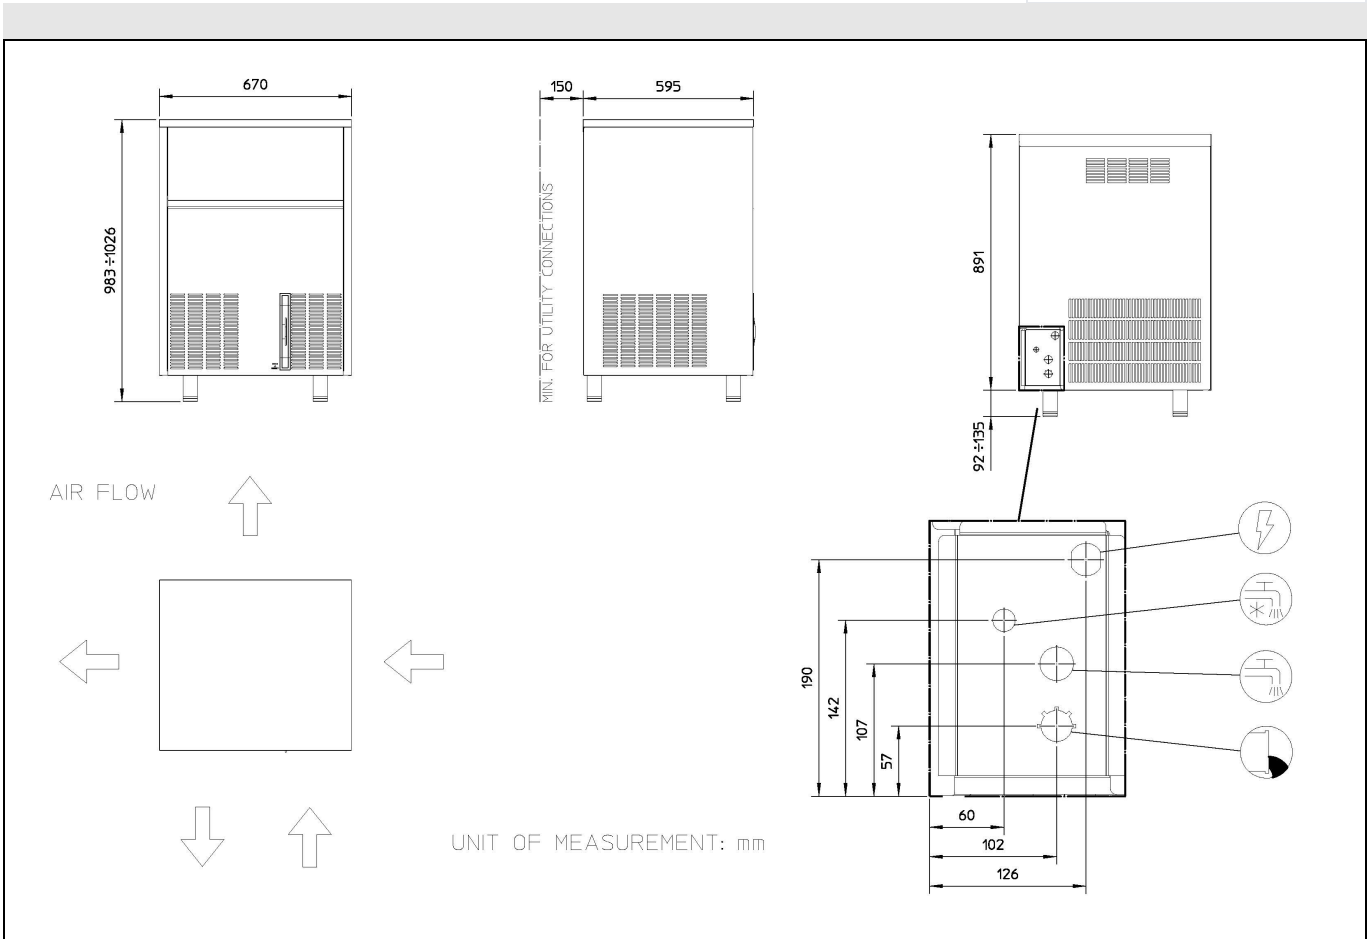

<b>UNIT DATA</b>			<b>SHIPPING DATA</b>			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)	670 x 595 x 893 mm		Size (W x D x H)	740 x 670 x 1080 mm							
Net weight	63 kg		Gross weight	76 kg							

Version	Voltage	Condensation	24 h ice production kg C Amb. / °C Water			Cap bin kg	Heat Rejection kW	Energy Consumption (+) kWh/24h	Water Usage (+) l/h	instant power W	circuit wires No. x Ømm <sup>2</sup>	Max. Fuse Size A
			10°C/10°C kg	21°C/10°C kg	32°C/21°C kg							
EXS 167 AS	230\50\1	A	77	75	55	33	1,5	15	8	750	3 x 1,0	10