

NU 157



Self Contained Ice Machine up to 89 kg

Item #:
Project:
Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.



NU 157
Dice 10 g
W 22 x D 22 x H 22 mm



NU H 157
Half Dice 6 g
W 10 x D 22 x H 28 mm



NU L 157
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled

INTERNAL BIN CAPACITY

20 kg

REFRIGERANT GAS

R290

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

230/50/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine up to 89 kg


NU 157



Self Contained Ice Machine up to 89 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 89 kg

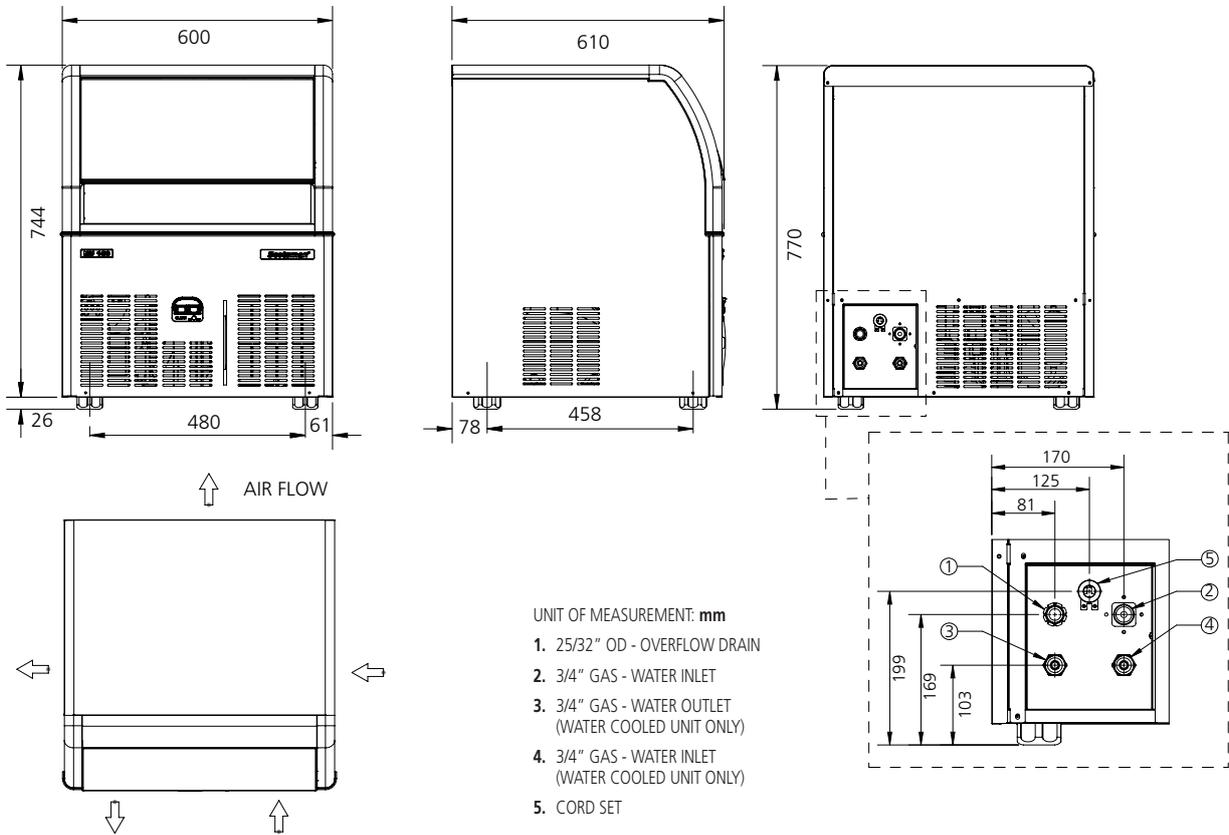

UNIT DATA		Compressor		Circuit wires		Max. fuse size		
		Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	600 x 610 x 770 mm	NU 157AS	230/50/1	2005	587	3	1.5	10
Net weight	51 kg	NU H 157 AS	230/50/1	2005	587	3	1.5	10
		NU L 157 AS	230/50/1	2005	587	3	1.5	10
SHIPPING DATA								
Carton (W x D x H)	670 x 680 x 920 mm							
Weight	65 kg							

Version	Condensation	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NU 157 AS	Air	230/50/1	85	75	55	15.7	8.9	4.8	400
NU H 157 AS	Air	230/50/1	89	80	58	15.8	9.2	5.2	400
NU L 157 AS	Air	230/50/1	87	78	55	16.7	9.2	3.6	400

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions