

9 Drawer Undercounter GN 1/1 Fridge

Series: ReFlex

Dimensions: 1750 mm (W) × 700 mm (D) × 850 mm (H)

Project: _____

Item #: _____



A nine-drawer, three-bay GN1/1 compatible undercounter fridge designed to store food at safe temperatures in busy kitchens at venues such as restaurants, clubs, pubs, and cafés. It is engineered to safely store food, and is energy-tested at climate class 4 to operate in ambient environments of up to 40°C. Certified M1 performance means guaranteed food storage between 1°C and 4°C, which is further adjustable via the SKOPE-connect smartphone app from -2°C to 15°C. The entire cabinet is made from 304 AISI stainless steel through the interior and exterior, over an insulating cyclopentane foamed core. The 850 mm height and 700 mm depth make it suitable for undercounter applications, while the integrated stainless steel worktop means it can be used as a food preparation counter. The nine fully extendable, refrigerated, stainless steel drawers are fitted with individual built-in key locks. The drawer linings are 304 stainless steel and fit GN1/1 pans up to 100 mm deep. The side-mounted fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. It is fully front-breathing and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all regional refrigeration and electrical safety standards.



Warranty



Natural Refrigerant




304 Stainless Steel



GN-compatible



SKOPE-connect

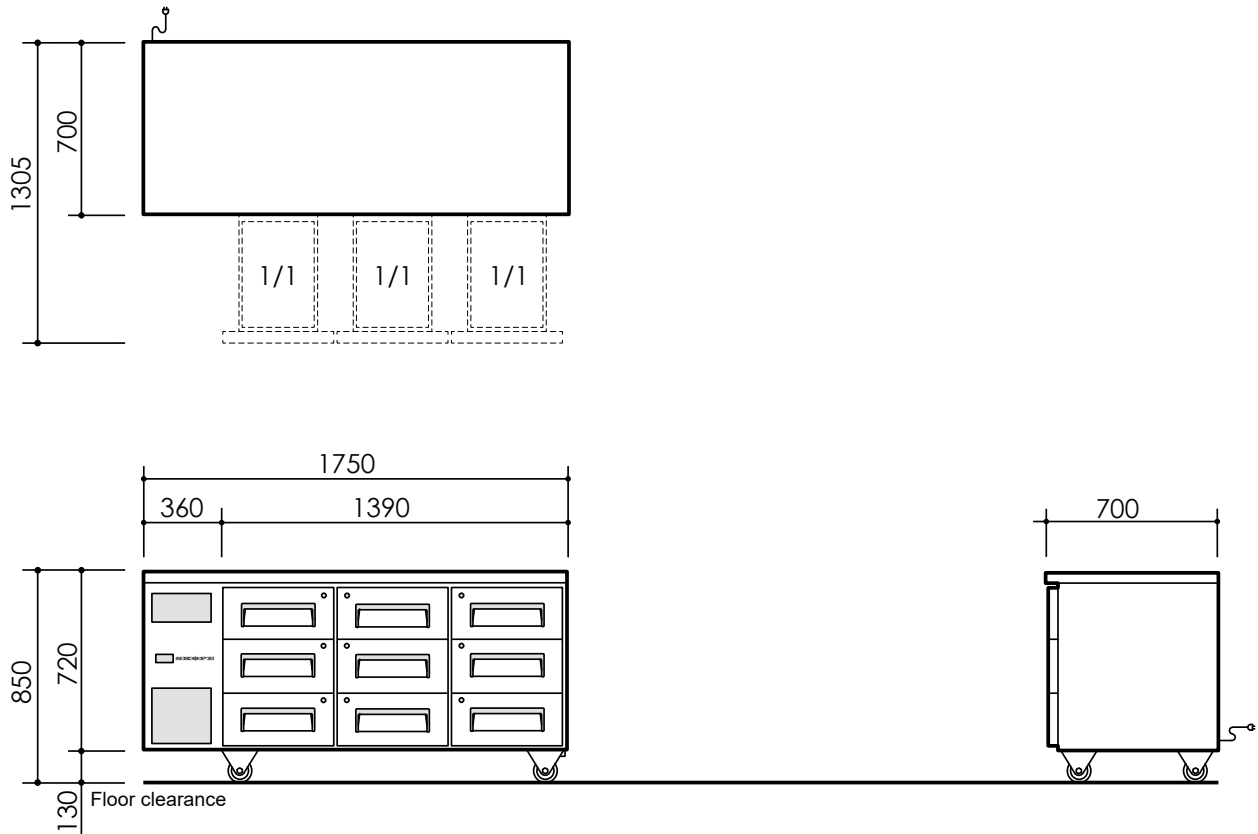

Cabinet

Range	ReFlex			
Finish	Stainless steel 304 AISI			
Insulation	Type	PU foam		
	Thickness (mm)	50		
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)		
Drawers	Lock	Barrel		
	Width (mm)	300	Depth (mm) 525	Height (mm) 120
	Gastronorm Compatible			
Lighting*	None			

Dimensions†

	External	Internal	Packed
Width (mm)	1750	1280	1810
Depth (mm)	700	530	760
Height (mm)	850 (standard castors)	570	900
	865 to 905 (legs) 720 (plinth mount)		
Weight (kg)	184	202	
Gross Volume (L)	387		
Net Volume (L)	136		
Footprint (m ²)	1.23		

Ventilation (mm)

Top	0	Sides	0	Rear	0
-----	---	-------	---	------	---

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

Performance

Product Temperature Range (°C)	1°C to 4°C (adjustable* from -2°C to 15°C)	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	65.7
	Hush Mode*	63.6

Energy Rating Standards

Energy Efficiency Class	D
Energy Efficiency Index	55.87
Climate and Temperature Class	4M1
Total Energy Consumption	3.27 kWh/24 h
Annual Energy Consumption	1194 kWh

Electrical

Supply	220-240 volts a.c., 50 Hz, Single phase supply
Cord	2000 mm power cord with 3-Pin, 10 amp, G-Type plug
Current Draw (A)	2.0

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)	
System Type	Removable cartridge	
Cartridge Weight (kg)	30	
Refrigerant/Charge	R290/95 g	
Nominal Capacity (W)	650	
Heat Rejection (W)	Average 135	Peak 150
Defrost Type	Automatic, electric	
Drainage	No plumbing required	



RF7.UBR.3.D9
on the SKOPE website

* Accessible via the free SKOPE-connect™ app.