

3 Solid Door GN Compatible Pizza Preparation Fridge

Series: ReFlex

Dimensions: 1800 mm (W) × 800 mm (D) × 1090 mm (H)*

* Height with legs is adjustable from 1150 to 1200.

Project: _____

Item #: _____



A three solid door pizza preparation fridge designed to store food at safe temperatures in busy kitchens at venues such as restaurants, clubs, pubs, and cafés. It is engineered to operate in ambient environments of up to 40°C with the lids closed or 30°C with the lids open. Temperatures are adjustable from 1°C to 5°C, or are further adjustable via the SKOPE-connect smartphone app from 0°C to 15°C. The entire cabinet is made from 304 AISI stainless steel through the interior and exterior, over an insulating cyclopentane foamed core. The fridge is suitable for use with 9 × GN1/3 pans or 18 × GN1/6 pans and comes with a removable, food-grade, 13 mm thick plastic cutting board that is suitable to use as a pizza preparation counter. The three self-closing solid swing doors with a stay-open position of 90° are fitted with built-in key locks. Inside the fridge, there is a door-activated LED light and 2 × adjustable-height plastic-coated wire shelves per door. The side-mounted fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. It is fully front-breathing and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all regional refrigeration and electrical safety standards.



Warranty



Natural Refrigerant




304 Stainless Steel



GN-compatible



SKOPE-connect

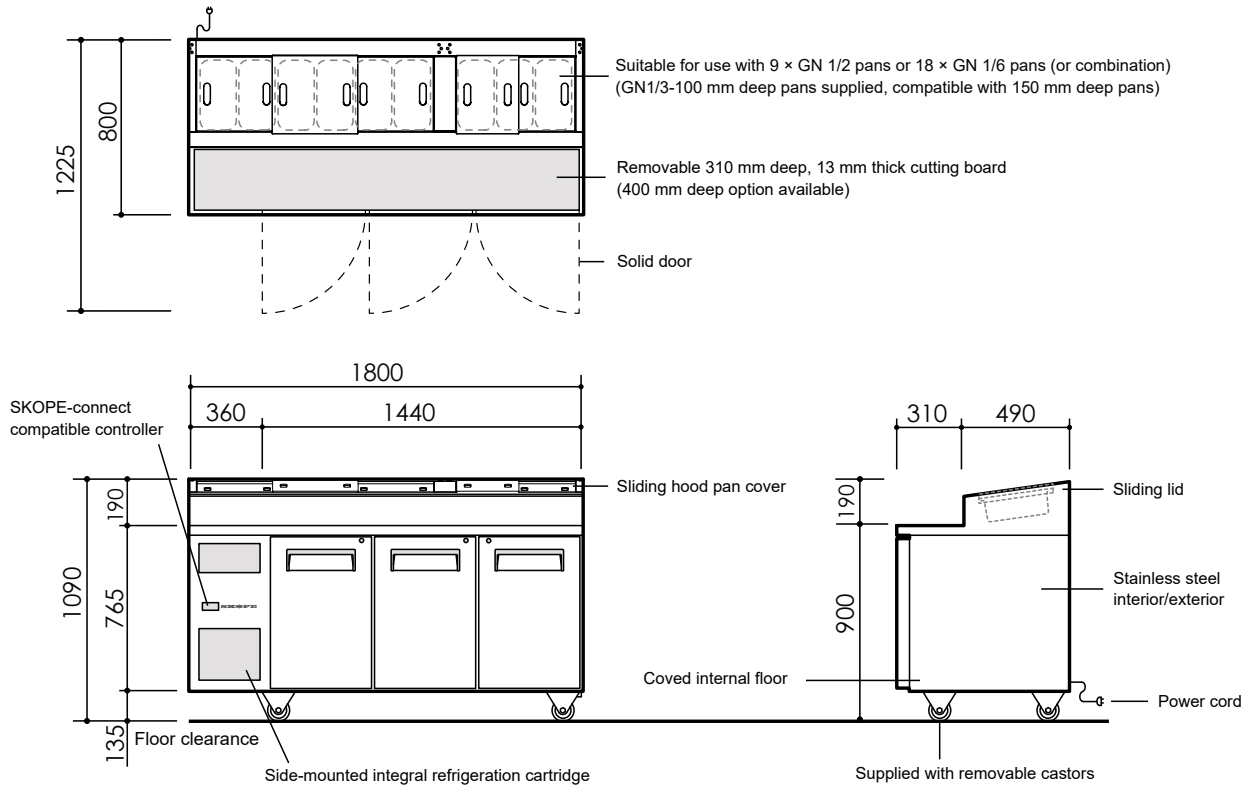

Cabinet

| | | | |
|-------------------|--|---------------------------------|-----|
| Range | ReFlex | | |
| Finish | Stainless steel 304 AISI | | |
| Insulation | Type | PU foam | |
| | Thickness (mm) | 50 | |
| | Blowing Agent | Cyclo-iso pentane (C5H10/C5H12) | |
| Doors | Type | Solid swing door (Barrel lock) | |
| | Opening Size | Height (mm) | 590 |
| | | Width (mm) | 370 |
| Shelving | Six adjustable height plastic coated wire shelves Adjustable shelves: Middle shelf 475mm wide x 610mm deep, Outer Shelf 415mm wide x 610mm deep | | |
| Gastronorm | Compatible | | |
| Lighting* | 2 x 400mm, 4W LED | | |

Dimensions†

| | External | Internal | Packed |
|----------------------------------|-------------------------|----------|--------|
| Width (mm) | 1800 | 1350 | 1850 |
| Depth (mm) | 800 | 640 | 870 |
| Height (mm) | 1090 (standard castors) | | |
| | 1150 to 1200 (legs) | 605 | 1200 |
| | 1005 (plinth mount) | | |
| Weight (kg) | 212 | | 229 |
| Gross Volume (L) | 523 | | |
| Footprint (m²) | 1.44 | | |

Ventilation (mm)

| | | | | | |
|------------|---|--------------|---|-------------|---|
| Top | 0 | Sides | 0 | Rear | 0 |
|------------|---|--------------|---|-------------|---|

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

| Linear dimensions | Single cabinet | | Multiple cabinets | |
|-------------------|-----------------|--|-------------------|------------------|
| | | | At each joint | At each end wall |
| Less than 1 metre | ±5 mm | | ±5 mm | +15 mm |
| More than 1 metre | -5 mm to +10 mm | | -5 mm to +10 mm | +15 mm |

Performance

| | |
|---|---|
| Product Temperature Range (°C) | 1°C to 5°C (adjustable* from 0°C to 15°C) |
| Maximum Ambient Temperature (°C) | 40 |
| Sound Level (dB(A)) | 68 |

Energy Rating Standards

| | |
|--------------------------------------|--------------------|
| Energy Efficiency Class | Exempt from Scheme |
| Energy Efficiency Index | Exempt from Scheme |
| Climate and Temperature Class | Exempt from Scheme |
| Total Energy Consumption | 5.45 kWh/24 h |
| Annual Energy Consumption | 1989 kWh |

Electrical

| | |
|-------------------------|--|
| Supply | 220-240 volts a.c., 50 Hz, Single phase supply |
| Cord | 2000 mm power cord with 3-Pin, 10 amp, G-Type plug |
| Current Draw (A) | 3.5 |

Refrigeration

| | | | |
|------------------------------|---|-----|-----------------|
| Controller | SCS Connect (SKOPE-connect™ compatible) | | |
| System Type | Removable cartridge | | |
| Cartridge Weight (kg) | 30 | | |
| Refrigerant/Charge | R290/90 g | | |
| Nominal Capacity (W) | 900 | | |
| Heat Rejection (W) | Average | 230 | Peak 290 |
| Defrost Type | Automatic, electric | | |
| Drainage | No plumbing required | | |



RF8.PPZ.3.SD
on the SKOPE website

* Accessible via the free SKOPE-connect™ app.