



Preparation

Convenience at your fingertips

Contents

Preparation Fridges ReFlex	4
Key Features	6
ReFlex Prep Summary	10
ReFlex Salad Prep Specs	12
ReFlex Pizza Prep Specs	14
Preparation Fridges ProSpec	16
Key Features	20
ProSpec Prep Summary	22
ProSpec Prep Specs	24







ReFlex[™]

Value-packed preparation refrigeration

ReFlex Preparation

Maximise Productivity & Profitability

Time is a precious commodity in a fast-paced food service kitchen, so we've designed ReFlex preparation fridges to maximise productivity and profitability. Ingredients are always within easy reach, with angled gastronorm pans for quick access and a comfortable-height built-in benchtop and cutting board, food prep is efficient and effective. ReFlex comes equipped with self-closing, lockable swing doors with stay-open position at ninety-degrees for seamless operation when both hands are full. ReFlex preparation fridges are quick to clean and maintain. Every part of the prep well is sized for easy handling by one person with no tools thanks to fully removeable magnetic brackets.



A Strong Foundation

ReFlex preparation fridges include all the features of the award-winning ReFlex series. From the robust 304 stainless steel construction and the energy-efficient green refrigeration system to the removable refrigeration cartridge, every detail of ReFlex preparation fridges has been meticulously designed to cater to the needs of a busy kitchen. ReFlex is an excellent investment for any foodservice business that values efficiency, productivity, profitability, and most importantly, food safety.

Unparalleled Food Safety

At SKOPE, food safety is paramount. Our leading-edge ChillGuard and SKOPE-connect technology is specifically designed to reduce waste and maximise the speed of delivery. Engineered to deliver crisp, cool air evenly across ingredients with unprecedented consistency, ChillGuard keeps food fresher for longer. At no extra cost, the SKOPE-connect app delivers ultra-precise temperature control, streamlined compliance, and lower refrigeration costs direct from your smartphone. At the press of a button you can adjust the temperature range to match food type, export data to support HACCP compliance, and analyse historical data to minimise power costs over time.



The SKOPE Difference | Nothing Performs like a SKOPE



Keep Food Fresher

ChillGuard, SKOPE's world-leading cold air control blows crisp, cool air to every corner of the food well to protect uncovered ingredients for longer.



Maximise Every Pound

The SKOPE-connect app monitors and controls temperature and energy consumption to maximise fridge performance and provide downloadable data of actual temperature history.



Eco-Friendly Refrigerant

Low energy R290 refrigerant consumes 38% less power than competitors, resulting in significant annual energy cost savings and environmental benefits.



Easy Clean Design

Removable magnetic brackets and fully removable pot wells enable easy cleaning, while rounded internal corners eliminate food traps for safer food preparation and storage.



Optimise Space

A compact, front-ventilated removable refrigeration cartridge allows fridges to be built-in or placed against a wall. A removable, washable filter makes maintenance easier.



Typical SKOPE Toughness

Strong 304 stainless steel interior and exterior for a hygienic work surface and maximum longevity.



Efficient Operation

Highly efficient performance in tough environments, including ambient temperatures of up to 40°C, making it perfect for even the hottest of kitchens.




Warranty Protection

SKOPE has always been synonymous with quality. That's why ReFlex is backed by a 3 year warranty.

ReFlex Preparation | Summary

Preparation range available in two, three and four door configurations



Salad Preparation Models

- Salad models available in two and three door configurations
- Prep wells are compatible with GN 1/3 and 1/6 pans up to 150mm deep

Pizza Preparation Models

- Pizza models available in three and four door configurations
- Complete with sliding lids
- Prep wells are compatible with GN 1/3 and 1/6 pans up to 150mm deep



GN1/3

GN1/6



RF7.PPS.2.SD



RF7.PPS.3.SD



RF8.PPZ.3.SD




RF8.PPZ.4.SD

Key Features


- Stainless steel GN 1/3 pans, 100mm deep (prep wells also fit GN 1/6 pans)
- Built-in stainless steel benchtop
- Door activated LED lights
- Removable 100mm castors
- SKOPE-connect app
- Salad models are complete with hinge lids, and Pizza models have sliding lids
- Salad models include a removable 200mm deep, 13mm thick cutting board
- Pizza models include a removable 310mm deep, 13mm thick cutting board (400mm deep option also available)

Options

- Extra shelves and clips
- 400mm wide cutting board for Pizza models

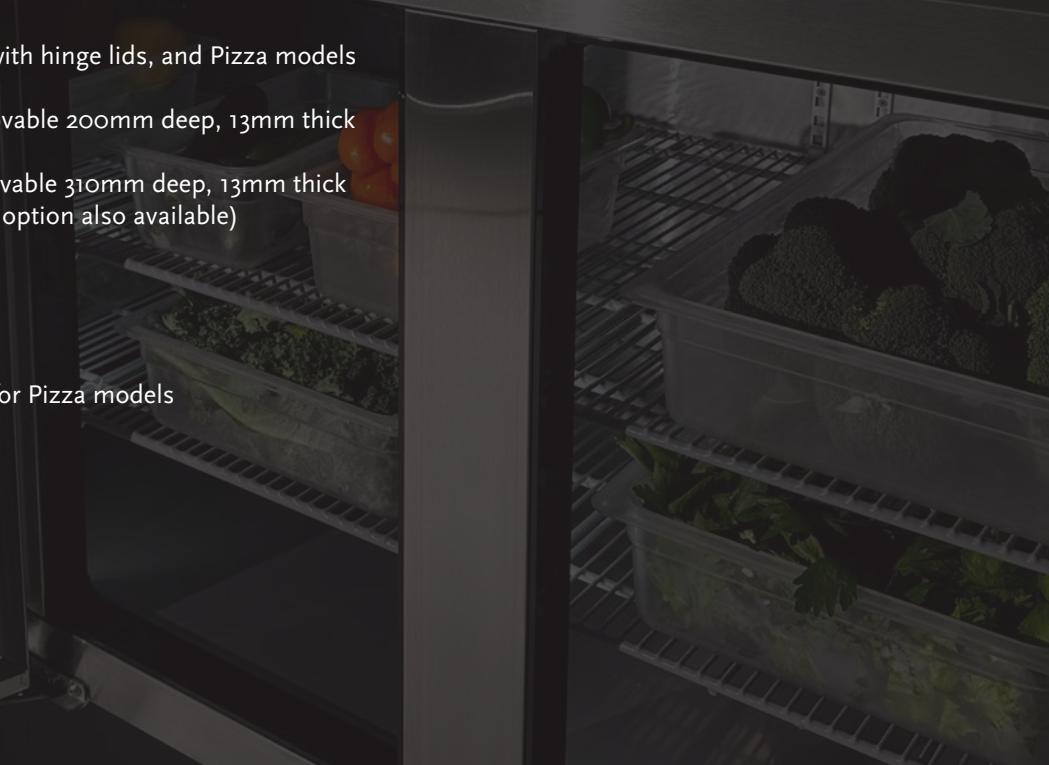

ReFlex Salad Preparation | Specifications

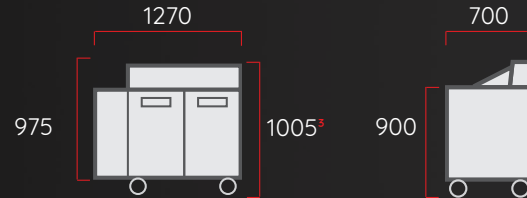

2 Door Salad Preparation Fridge

Product Details

Model Number	RF7.PPS.2.SD
Worktop Height (mm)	900
Footprint (m ²)	0.89
Shelves	2 x adjustable wire shelves per door plus base
Interior Lighting	1 x 400mm, 4W LED (door activated)

Storage Capacity

Internal Volume (L)	217
GN 1/3 Pan Capacity ¹	4 (max 150mm deep)
GN 1/6 Pan Capacity	8 (max 150mm deep)

Performance


Max Ambient Temperature (°C)	40 ²
Temperature Range (°C)	1 to 5 (adjustable from 0 to -15 via SKOPE-connect)
EEl	TBC
Energy Consumption (kWh/24h)	2.67
Energy Rating	TBC
Current Draw (Amps)	2.0



¹ Supplied with GN 1/3 pans, 100mm deep.

² 40°C lid(s) closed, or 30°C lid(s) open.

³ Add gomm for lid open.

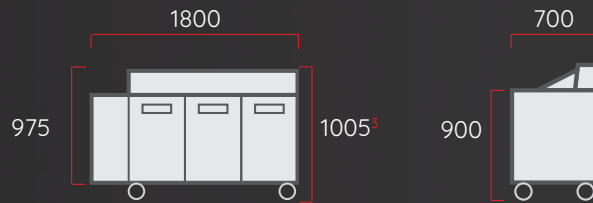

3 Door Salad Preparation Fridge

RF7.PPS.3.SD

900

1.26

2 x adjustable wire shelves per door plus base

2 x 400mm, 4W LED (door activated)

354

7 (max 150mm deep)

14 (max 150mm deep)

40²

1 to 5 (adjustable from 0 to -15 via SKOPE-connect)

TBC

3.58

TBC

2.0

Download
Spec Sheets
on our website



ReFlex Salad Preparation | Specifications



3 Door Pizza Preparation Fridge

Product Details

Model Number	RF8.PPZ.3.SD
Worktop Height (mm)	900
Footprint (m ²)	1.44
Shelves	2 x adjustable wire shelves per door plus base
Interior Lighting	2 x 400mm, 4W LED (door activated)

Storage Capacity

Internal Volume (L)	523
GN 1/3 Pan Capacity ¹	9 (max 150mm deep)
GN 1/6 Pan Capacity	18 (max 150mm deep)

Performance


Max Ambient Temperature (°C)	40 ²
Temperature Range (°C)	1 to 5 (adjustable from 0 to -15 via SKOPE-connect)
EEl	TBC
Energy Consumption (kWh/24h)	5.45
Energy Rating	TBC
Current Draw (Amps)	3.5 (incl unit 2.2)



¹ Supplied with GN 1/3 pans, 100mm deep.

² 40°C lid(s) closed, or 30°C lid(s) open.

³ Add 320mm for lid open.

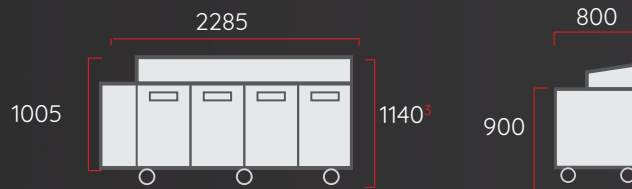

4 Door Pizza Preparation Fridge

RF8.PPZ.4.SD

900

1.83

2 x adjustable wire shelves per door plus base

2 x 400mm, 4W LED (door activated)

710

12 (max 150mm deep)

24 (max 150mm deep)

40²

1 to 5 (adjustable from 0 to -15 via SKOPE-connect)

TBC

5.83

TBC

3.5 (incl unit 2.2)

Download
Spec Sheets
on our website





A close-up, high-angle photograph of a refrigerator's interior, showing several drawers with metal handles. The lighting is dramatic, highlighting the metallic surfaces and the depth of the drawers.

ProSpecTM

Premium preparation refrigeration

ProSpec Preparation

Preparation Perfection

Introducing our ProSpec preparation fridges, meticulously crafted to prioritise food safety, exceptional build quality and innovative design for maximum productivity and profitability in fast-paced foodservice kitchens. Our thoughtful design includes easy access pans, and self-closing, lockable swing doors with a stay-open position at ninety degrees, ensuring smooth operation even with full hands. Plus, cleaning and maintenance are a breeze, as every part of the prep well is easily removable for hygienic handling by just one person, with no tools required.





Expertly Crafted

ProSpec Preparation fridges are engineered for world-leading food safety. With SKOPE's unique ChillGuard system, we evenly distribute air above and below GN pans that can be up to 150mm deep. We guarantee M1 performance in the well, for up to four hours, even with the lids off (at 30°C ambient temperature). Whilst food-safe storage is guaranteed in the well with the supplied removable lids at 40°C ambient temperatures. Setting the new benchmark for preparation refrigeration, including a sleek, clean aesthetic, high-spec performance and integrated food safety data collection. Available in multiple door configurations with both left or right hand services, these 1/3 gastronorm preparation fridges include key features like LED lights, adjustable height position on feet, and optional extra shelves.

The SKOPE Difference | Nothing Performs like a SKOPE



Keep Food Fresher

Even, controlled airflow ensures uniform cooling across the food well, supporting food-safe storage and extending the freshness of ingredients.



Covers Every Need

ProSpec provides integration with gastronomic appliances (ovens, hot boxes, etc), thanks to our standard 304 stainless steel shelves and E-bracket which maximises storage for GN pans on the same runner.



Unprecedented Control

Choose the optimum climate for your product and obtain temperature history. Do it all at the touch of your smartphone with the free SKOPE-connect app.



Maximise Your Space

ProSpec's refrigeration system is completely front-breathing and slim in width, meaning you get more cold storage from your footprint. Our interchangeable modular cartridge design means less downtime for quicker maintenance.



Integrate Into Your Benchtop

Either integrate the well into your custom benchtop (via our engineered drop-in collar) or have as a free-standing Prep bench with a worktop.



Unrivalled Energy Efficiency

The ProSpec runs on R290 natural refrigerant to ensure energy efficiency while providing virtually zero global warming impact.



Efficient Operation

Highly efficient performance in tough environments, including ambient temperatures of up to 40°C, making it perfect for even the hottest of kitchens.



Warranty Protection

SKOPE has always been synonymous with quality. That's why ProSpec is backed by a 3 year warranty.

ProSpec Preparation | Summary

Preparation range available in two and three door configurations



GN1/3



GN1/6




PG13.PPS.DC.2.SD



PG13.PPS.DC.3.SD

Preparation Models

- Models are available in two and three door configurations
- Prep wells are compatible with 100mm and 150mm deep GN 1/3 and 1/6 pans
- Available with left or right hand services



A Minimalist Aesthetic



Unprecedented Control



A Powerful Food Safety Barrier



PG13.PPS.2.SD



PG13.PPS.DC.2.SD.RH



PG13.PPS.DC.3.SD



PG13.PPS.3.SD.RH


Key Features

- Natural R290 refrigerant
- 304 stainless steel on all surfaces
- Heated collar to hold pans and prevent condensation to the top
- Easy to clean seamless design
- Ergonomic handle design in 3mm gauge stainless steel
- Stainless steel wire shelving as standard
- Tool-free removable louvre with access to cleanable condenser filter
- Built in stainless steel top as standard

Options

- Integrated pan collar or drop-in version for custom benchtops
- Set of castors
- Set of low or high profile castors
- Extra GN 1/1 stainless steel wire shelf and slides
- Alternate punched stainless steel GN 1/1 shelves

ProSpec Preparation | Specifications

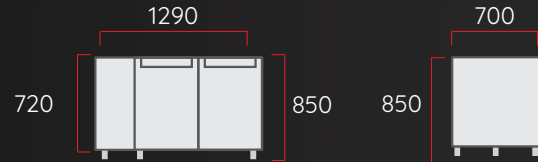

Product Details


2 Door Salad Preparation Drop-in Collar Fridge

Model Number	PG13.PPS.DC.2.SD
Worktop Height (mm)	850
Footprint (m ²)	0.9
Shelves	4 x stainless steel wire shelves
Interior Lighting	1 x 400mm, 4W LED (door activated)
Storage Capacity	
Internal Volume (L)	225
GN 1/3 Pan Capacity ¹	4 (max 150mm deep)
GN 1/6 Pan Capacity	8 (max 150mm deep)
Performance	
Max Ambient Temperature (°C)	40 ²
Temperature Range (°C)	-1 to 5 (adjustable from 0 to -15 via SKOPE-connect)
EEl	TBC
Energy Consumption (kWh/24h)	3.50
Energy Rating	TBC
Current Draw (Amps)	1.5



¹ Supplied with GN 1/3 pans, 100mm deep.

² 40°C lid(s) closed, or 30°C lid(s) open.

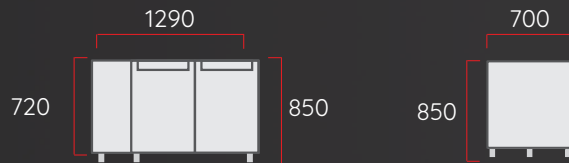

2 Door Salad Preparation Fridge

PG13.PPS.2.SD

850

0.9

4 x stainless steel wire shelves

1 x 400mm, 4W LED (door activated)

225

4 (max 150mm deep)

8 (max 150mm deep)

40²

1 to 5 (adjustable from 0 to -15 via SKOPE-connect)

TBC

4.70


TBC

1.8

Download
Spec Sheets
on our website



ProSpec Preparation | Specifications

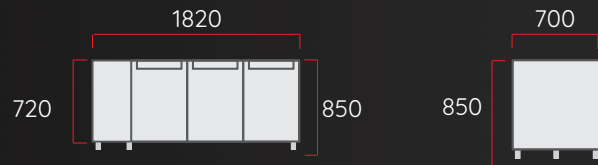

Product Details

3 Door Salad Preparation Fridge

Model Number	PG13.PPS.3.SD
Worktop Height (mm)	850
Footprint (m ²)	1.27
Shelves	6 x stainless steel wire shelves
Interior Lighting	2 x 400mm, 4W LED (door activated)

Storage Capacity

Internal Volume (L)	372
GN 1/3 Pan Capacity ¹	7 (max 150mm deep)
GN 1/6 Pan Capacity	14 (max 150mm deep)


Performance

Max Ambient Temperature (°C)	40 ²
Temperature Range (°C)	-1 to 5 (adjustable from 0 to -15 via SKOPE-connect)
EEl	TBC
Energy Consumption (kWh/24h)	4.70
Energy Rating	TBC
Current Draw (Amps)	1.8



¹ Supplied with GN 1/3 pans, 100mm deep.

² 40°C lid(s) closed, or 30°C lid(s) open.

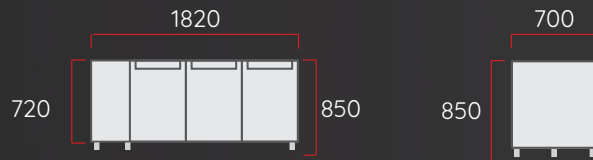

3 Door Salad Preparation Drop-in Collar Fridge

PG13.PPS.DC.3.SD

850

1.27

6 x stainless steel wire shelves
2 x 400mm, 4W LED (door activated)

372

7 (max 150mm deep)

14 (max 150mm deep)

40²

1 to 5 (adjustable from 0 to -15 via SKOPE-connect)

TBC

4.70

TBC

1.8

Download
Spec Sheets
on our website



The logo for Hubbard Systems, featuring a grey square above the word "Hubbard" and a red square above the word "systems".

Hubbard Systems (A division of HTG Trading Ltd)
106 Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL
sales@hubbardsystems.co.uk
01473 350046
www.hubbardsystems.co.uk

SKOPE
www.skope.com

Information contained in this document has been checked for accuracy at the time of production. SKOPE reserves the right to alter any detail without notice. Conditions are subject to change without notice. The photographs used in this publication are for illustrative purposes only. Minor design changes may result in slight variations between the product illustrated and the final delivered product.

Copyright © SKOPE Industries Limited. All rights reserved. SKOPE Industries Ltd reserves the right to alter specifications without notice. Visit www.skope.com for the most recent specification documents.