

■ **Hubbard**
■ *systems*



SKOPE[®]

Premium Commercial Refrigeration

Experience the quality and precision that comes from over 50 years in the industry.

Experience industry leading engineering and expert design.

Experience premium commercial refrigeration at the top of its game.

Experience SKOPE



STORAGE

Counter and Upright



Award Winning Technology

ReFlex was named the Foodservice Consultants Society International (FCSI) Best New Hospitality Equipment Product at Fine Food Australia due to its innovation and value.



Flexible Food Storage

The ReFlex series of 2, 3 and 4 door counter food storage fridge models come with either solid doors, glass doors, or refrigerated drawers to cater for the varied requirements of food service businesses.



Maximise Every Pound

SKOPE-connect is the app that monitors and controls temperature, lighting, and energy consumption from your smartphone to maximise fridge performance and increase the profitability of your business.



Eco-friendly Refrigerant

Low energy R290 refrigerant delivers cutting-edge efficiency resulting in significant annual energy cost savings and environmental benefits.



Optimise Space

A compact, front-ventilated removeable refrigeration cartridge allows refrigeration to be built-in or placed against a wall. A removable, washable filter makes maintenance easier.



Typical SKOPE Toughness

Strong 304 stainless steel interior and exterior and the specification of quality components delivers SKOPE reliability and toughness that maximises the life of your appliance.



Precise Temperature Performance

ReFlex fridges and freezers consistently hold temperature, even in ambient temperatures of up to 40°C¹, making it perfect for even the hottest of kitchens.












Warranty Protection

SKOPE has always been synonymous with quality, that's why our ReFlex counter fridges and freezers are backed by a full 3 year warranty.

¹RF6.UBR.1.SD and RF6.UBF.1.SD have maximum ambient temperatures of 30°C

Counter Fridges | ReFlex

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C)	Weight (kg)	Energy Consumption (kWh/24h)
1 Bay Fridge  820  600 850 635  Volume (L) = 139	RF6.UBR.1.SD	1 Bay Solid Door with 3 Shelves	Stocked	0.24	1.0	30	50	1.30
2 Bay Fridges  720  1290 850 700  Volume (L) = 248	RF7.UBR.2.SD	2 Bay Solid Doors with 2 Shelves per Door	Stocked	0.48	2.0	40	106	1.86
	RF7.UBR.2.GD	2 Bay Glass Doors with 2 Shelves per Door	Stocked	0.48	2.0	40	116	2.39
	RF7.UBR.2.D6	2 Bay 6 Drawers	Stocked	0.48	2.0	40	153	2.37
2 Bay 1500-wide Fridge  720  1500 850 700  Volume (L) = 333	RF7.UBR.2XL.SD	2 Bay 1500 Wide Solid Doors with 2 Shelves per Door	Ready to Order	0.48	2.0	40	115	2.11

STANDARD OPTIONS

Model Number	Extra Shelf & Clips (per level)	GN Slide Kit (2 levels) ^{1,2}	GN Runners (1 pair) ^{1,2}	Set of Legs ³	Set of Low Profile Castors ⁴
RF6.UBR.1	SKC-2-120-0199-0-KIT-1	RCRU2302/RF7-RETRO	RCRU2301/154-SS	KN-SXX12132-KIT-4	SXX12613-KIT-4
RF7.UBR.2	KN-WRK12029-KIT-2				
RF7.UBR.2XL	KN-WRK12619-KIT-2				



Counter Fridges | ReFlex

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C)	Weight (kg)	Energy Consumption (kWh/24h)
3 Bay Fridges 								
	RF7.UBR.3.SD	3 Bay Solid Doors with 2 Shelves per Door	Stocked	0.48	2.0	40	130	2.81
	RF7.UBR.3.GD	3 Bay Glass Doors with 2 Shelves per Door	Stocked	0.48	2.0	40	135	3.77
	RF7.UBR.3.D9	3 Bay 9 Drawers	Ready to Order	0.48	2.0	40	184	3.27
4 Bay Fridges 								
	RF7.UBR.4.SD	4 Bay Solid Doors with 2 Shelves per Door	Stocked	0.48	2.0	40	155	3.77
	RF7.UBR.4.GD	4 Bay Glass Doors with 2 Shelves per Door	Ready to Order	0.48	2.0	40	155	4.47

STANDARD OPTIONS

Model Number	Extra Shelf & Clips (per level)	GN Slide Kit (2 levels) ^{1 2}	GN Runners (1 pair) ^{1 2}	Set of Legs ³	Set of Low Profile Castors ⁴
RF7.UBR.3	KN-WRK12029-KIT-3	RCRU2303/RF7-RETRO	RCRU2301/154-SS	KN-SXX12132-KIT-4	SXX12613-KIT-4
RF7.UBR.4	KN-WRK12029-KIT-4	RCRU2304/RF7-RETRO		KN-SXX12132-KIT-6	SXX12613-KIT-6

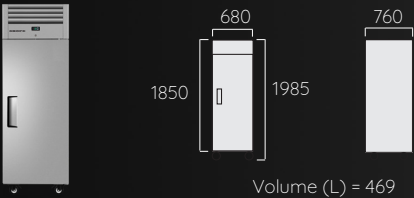
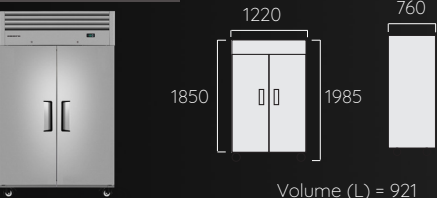
Counter Freezers | ReFlex

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C)	Weight (kg)	Energy Consumption (kWh/24h)
<p>1 Bay Freezer</p> <p>Volume (L) = 146</p>	RF6.UBF.1.SD	1 Bay Solid Door with 3 Shelves	Stocked	0.36	1.5	30	52	4.84
<p>2 Bay Freezer</p> <p>Volume (L) = 248</p>	RF7.UBF.2.SD	2 Bay Solid Doors with 2 Shelves per Door	Stocked	0.96	4.0	40	112	7.27
<p>3 Bay Freezer</p> <p>Volume (L) = 387</p>	RF7.UBF.3.SD	3 Bay Solid Doors with 2 Shelves per Door	Stocked	0.96	4.0	40	136	9.45

STANDARD OPTIONS

Model Number	Extra Shelf & Clips (per level)	GN Slide Kit (2 levels) ¹	GN Runner (1 extra pair) ¹	Set of Legs ²	Set of Low Profile Castors ³
RF6.UBF.1.SD	SKC-2-120-0199-0-KIT-1	RCRU2302/RF7-RETRO	RCRU2301/154-SS	KN-SXX12132-KIT-4	SXX12613-KIT-4
RF7.UBF.2.SD	KN-WRK12029-KIT-2				
RF7.UBF.3.SD	KN-WRK12029-KIT-3	RCRU2303/RF7-RETRO			

Upright Fridges | ReFlex

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C)	Weight (kg)	Energy Consumption (kWh/24h)
<p>1 Door Upright Fridge</p>  <p>Volume (L) = 469</p>	RF7.UPR.1.SD	1 Solid Door with 5 Shelves	Stocked	0.48	2.0	40	115	2.00
<p>2 Door Upright Fridge</p>  <p>Volume (L) = 921</p>	RF7.UPR.2.SD	2 Solid Door with 5 Shelves per Door	Stocked	0.48	2.0	40	159	3.91

STANDARD OPTIONS

Model Number	Extra Shelf & Clips (per level)	Set of Legs	Retrofit Hinge Kit (per door)
RF7.UPR.1.SD	KN-WRK12026-KIT-1	KN-SXX12132-KIT-4	KN-HIN12003
RF7.UPR.2.SD	KN-WRK12027-KIT-2		

Upright Fridge & Freezer | ReFlex

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C)	Weight (kg)	Energy Consumption (kWh/24h)
<p>2 Door Upright Fridge / Freezer</p> <p>Volume (L) = 517 (x2)</p>	RF8.UPC.2.SD	2 Solid Door with 5 Shelves per Door	Ready to Order	1.44	6.0	40	227	9.36

STANDARD OPTIONS

Model Number	Extra Shelf & Clips (per level)	Set of Legs
RF8.UPC.2.SD	KN-WRK12028-KIT-2	KN-SXX12132-KIT-4

Upright Freezer | ReFlex

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C)	Weight (kg)	Energy Consumption (kWh/24h)
<p>1 Door Upright Freezer</p> <p>Volume (L) = 469</p>	RF7.UPF.1.SD	1 Solid Door with 5 Shelves	Stocked	0.96	4.0	40	122	7.40
<p>2 Door Upright Freezer</p> <p>Volume (L) = 921</p>	RF7.UPF.2.SD	2 Solid Door with 5 Shelves per Door	Stocked	1.20	5.0	40	171	10.64

STANDARD OPTIONS

Model Number	Extra Shelf & Clips (per level)	Set of Legs	Retrofit Hinge Kit (per door)
RF7.UPF.1.SD	KN-WRK12026-KIT-1	KN-SXX12132-KIT-4	KN-HIN12003
RF7.UPF.2.SD	KN-WRK12027-KIT-2		

PREPARATION

Salad and Pizza



Keep Food Fresher

ChillGuard, SKOPE's world-leading cold air control blows crisp, cool air to every corner of the food well to protect uncovered ingredients for longer.



Maximise Every Pound

The SKOPE-connect app monitors and controls temperature and energy consumption to maximise fridge performance and provide downloadable data of actual temperature history.



Eco-Friendly Refrigerant

Low energy R290 refrigerant consumes 38% less power than competitors, resulting in significant annual energy cost savings and environmental benefits.



Easy Clean Design

Removable magnetic brackets and fully removable pot wells enable easy cleaning, while rounded internal corners eliminate food traps for safer food preparation and storage.



Optimise Space

A compact, front-ventilated removable refrigeration cartridge allows fridges to be built-in or placed against a wall. A removable, washable filter makes maintenance easier.



Typical SKOPE Toughness

Strong 304 stainless steel interior and exterior for a hygienic work surface and maximum longevity.



Efficient Operation

Highly efficient performance in tough environments, including ambient temperatures of up to 40°C, making it perfect for even the hottest of kitchens.



Warranty Protection

SKOPE has always been synonymous with quality. That's why ReFlex is backed by a 3 year warranty.

Preparation Fridges | ReFlex

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C) ²	Weight (kg)	Energy Consumption (kWh/24h)
<p>2 Bay Salad Prep</p> <p>Volume (L) = 217</p>	RF7.PPS.2.SD	2 Bay Salad Preparation with 4 GN 1/3 Cold Well Capacity & 2 Shelves per Door ¹	Ready to Order	0.48	2.0	40	139	2.67
<p>3 Bay Salad Prep</p> <p>Volume (L) = 357</p>	RF7.PPS.3.SD	3 Bay Salad Preparation with 7 GN 1/3 Cold Well Capacity & 2 Shelves per Door ¹	Ready to Order	0.48	2.0	40	162	3.58

STANDARD OPTIONS

Model Number	Extra Shelf & Clips (per level)
RF7.PPS.2.SD	SKC-2-190-0061-0-KIT-2
RF7.PPS.3.SD	SKC-2-190-0045-0-KIT-3

RF7.PPS (Salad Prep) models include a removable 200mm deep, 13mm thick cutting board.

Preparation Fridges | ReFlex

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C) ⁴	Weight (kg)	Energy Consumption (kWh/24h)
<p>3 Bay Pizza Prep</p> <p>Volume (L) = 523</p>	RF8.PPZ.3.SD	3 Bay Pizza Preparation with 9 GN 1/3 Cold Well Capacity with sliding lids & 2 Shelves per Door ³	Ready to Order	0.84	3.5	40	212	5.45
<p>4 Bay Pizza Prep</p> <p>Volume (L) = 710</p>	RF8.PPZ.4.SD	4 Bay Pizza Preparation with 12 GN 1/3 Cold Well Capacity with sliding lids & 2 Shelves per Door ³	Ready to Order	0.84	3.5	40	233	5.83


STANDARD OPTIONS

Model	Extra Shelf & Clips (per level)	400mm Wide Cutting Board	Gantry Adapter Kits
RF8.PPZ.3.SD	SKC-2-190-0072-0-KIT-3	SKC-2-190-0088-0	SXX12789
RF8.PPZ.4.SD	SKC-2-190-0073-0-KIT-4	SKC-2-190-0087-0	

RF8.PPZ (Pizza Prep) models include a removable 310mm deep, 13mm thick cutting board (400mm deep option available).

DISPLAY

Top and Bottom Mount



Energy Efficient by Design

ActiveCore's eco-friendly R290 refrigerant delivers incredible efficiency, with running costs halved compared to some competitors.



Lower Impact Refrigeration

The Global Warming Potential of our natural refrigerant is virtually zero. Other refrigerants can be over 54,000 times worse for the environment.



Precise Temperature Performance

ActiveCore fridges and freezers consistently hold temperature, even in ambient temperatures of up to 40°C, making it perfect for even the hottest environments.



Unprecedented Control

The SKOPE-connect app monitors and controls temperature and energy consumption to maximise fridge performance and provide downloadable data of actual temperature history.



Powerful Merchandising Impact

ActiveCore fridges and freezers feature bright, LED lighting that makes products stand out and attract attention. For even greater brand presence, you can customise with illuminated sign panels or branded decals.



Quicker, Safer Servicing

Major servicing can close your business for hours with other brands. SKOPE's ActiveCore interchangeable refrigeration cartridge means the cartridge can be swapped out in 5-10 minutes so repairs can be made safely offsite.



Typical SKOPE Toughness





Our powder coat finish on a galvanised steel body, along with rigorously tested components throughout, ensure SKOPE products work better for longer.



Warranty Protection

SKOPE has always been synonymous with quality. That's why ActiveCore is backed by a 3 year warranty.

Upright Fridges | ActiveCore Top Mount

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C)	Weight (kg)	Energy Consumption (kWh/24h)
1 Door Upright GDMs  2120 740 2200 695 (745 with handle) Volume (L) = 558	TME650N-A	1 Glass Door with 5 Shelves	Ready to Order	0.38	1.6	40	152	1.6
	TME650N-AC	1 Glass Door Lit Sign with 5 Shelves	Ready to Order	0.38	1.6	40	155	1.7
2 Door Upright GDMs  2120 1130 2200 695 (745 with handle) Volume (L) = 897	TME1000N-A	2 Glass Door with 5 Shelves	Ready to Order	0.41	1.7	40	201	2.7
	TME1000N-AC	2 Glass Door Lit Sign with 5 Shelves per Door	Ready to Order	0.41	1.7	40	207	2.88
1 Door Upright GDMs  1930 740 2005 745 (795 with handle) Volume (L) = 584	BME600N-A	1 Glass Door with 5 Shelves	Ready to Order	0.38	1.6	40	156	1.6
	BME600N-AC	1 Glass Door Lit Sign with 6 Shelves	Ready to Order	0.38	1.6	40	164	1.71
2 Door Upright GDMs  1930 1280 2005 745 (795 with handle) Volume (L) = 1079	BME1200N-A	2 Glass Door with 5 Shelves per Door	Ready to Order	0.41	1.7	40	228	2.55
	BME1200N-AC	2 Glass Door Lit Sign with 6 Shelves per Door	Ready to Order	0.41	1.7	40	244	2.74

Upright Freezers | ActiveCore

Specifications (mm)	Model Number	Description	Availability	kW	Amps	Max Ambient Temp (°C)	Weight (kg)	Energy Consumption (kWh/24h)
1 Door Upright Display Freezers								
<p>Volume (L) = 557</p>	TMF650N-A	1 Glass Door with 5 Shelves	Stocked	1.32	5.5	40	172	10.47
2 Door Upright Display Freezers								
<p>Volume (L) = 896</p>	TMF1000N-A	2 Glass Door with 5 Shelves	Stocked	1.32	5.5	40	225	16.17

STANDARD OPTIONS										CUSTOM OPTIONS			
Model Number	Lit Sign	Ice Freezer	Extra Shelf & Clips (per level)	High Capacity Shelf (>20kg)	Punched S/S Shelves per Cabinet	Solid Doors	Other Colours ³	Merchandising Strips	Retrofit Hinge Kit (white)	Remote	Barrel or Hasp Lock	Baskets (instead of shelves)	Bumpers
TMF650N-A	AC Model	Ice Model	HB0070110864-KIT-1	V65FV/575HD-WH-KIT-1				HB0070202185-KIT-5	SM65BYN/D100-32				
TMF1000N-A	AC Model	Ice Model	HB0070110863-KIT-1	V10FV/575HD-WH-KIT-1				HB0070202186-KIT-10					

Exclusively distributed in the United Kingdom by:



Hubbard Systems (A division of HTG Trading Ltd)
106 Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL
sales@hubbardsystems.co.uk
01473 350046
www.hubbardsystems.co.uk

SKOPE
www.skope.com