



**SKOPE**<sup>®</sup>



**SKOPE**



# Storage - Counter

Reliable performance, unbeatable value

[skope.com](http://skope.com)

# Contents

<b>Counter Fridges &amp; Freezers   ReFlex</b>	4
Key Features	6
ReFlex Fridge Summary	10
ReFlex Fridge Specs	12
ReFlex Freezer Summary	18
ReFlex Freezer Specs	20
<b>Counter Fridges &amp; Freezers   ProSpec</b>	22
Key Features	24
ProSpec Fridge Summary	28
ProSpec Fridge Specs	30
ProSpec ChefBase Summary	38
ProSpec ChefBase Specs	40
ProSpec Freezer Summary	42
ProSpec Freezer Specs	44







# ReFlex Counter

Reliable performance, unbeatable value



ReFlex™

## Unbeatable value

Award winning food storage refrigeration designed for food service businesses looking to maximise every pound. ReFlex combines cutting-edge power savings and the time-saving advantages of the SKOPE-connect app with traditional SKOPE toughness and temperature consistency. That's why ReFlex was named the Foodservice Consultants Society International (FCSI) Best New Hospitality Equipment Product at Fine Food Australia.

## Unparalleled food safety

At SKOPE, food safety is paramount. Our leading edge SKOPE-connect technology is specifically designed to deliver ultra-precise temperature control, streamlined compliance, and lower refrigeration costs direct from your smartphone. At the press of a button you can adjust the temperature range to match food type, export data for HACCP compliance, and analyse historical data to minimise power costs over time.



# The SKOPE Difference | Nothing performs like a SKOPE



## Award Winning Technology

ReFlex was named the Foodservice Consultants Society International (FCSI) Best New Hospitality Equipment Product at Fine Food Australia due to its innovation and value.



## Flexible Food Storage

The ReFlex series of 2, 3 and 4 door counter food storage fridge models come with either solid doors, glass doors, or refrigerated drawers to cater for the varied requirements of food service businesses.



## Maximise Every Pound

SKOPE-connect is the app that monitors and controls temperature, lighting, and energy consumption from your smartphone to maximise fridge performance and increase the profitability of your business.



## Eco-friendly Refrigerant

Low energy R290 refrigerant delivers cutting-edge efficiency resulting in significant annual energy cost savings and environmental benefits.

<sup>1</sup>RF6.UBR.1.SD and RF6.UBF.1.SD have maximum ambient temperatures of 30°C



#### Optimise Space

A compact, front-ventilated removeable refrigeration cartridge allows refrigeration to be built-in or placed against a wall. A removable, washable filter makes maintenance easier.



#### Typical SKOPE Toughness

Strong 304 stainless steel interior and exterior and the specification of quality components delivers SKOPE reliability and toughness that maximises the life of your appliance.



#### Precise Temperature Performance

ReFlex fridges and freezers consistently hold temperature, even in ambient temperatures of up to 40°C<sup>1</sup>, making it perfect for even the hottest of kitchens.



#### Warranty Protection

SKOPE has always been synonymous with quality, that's why our ReFlex counter fridges and freezers are backed by a full 3 year warranty.


# ReFlex Counter Fridge | Summary

Perfect for:


- Food-service kitchens that require reliable performance
- Operators who need a value-packed product
- Placing throughout your kitchen for optimised work efficiency

## Available Configurations

- Doors – 1, 2, 3, 4
- Door Finish Options – solid, glass, drawers (1 bay only available with solid door)
- Exterior & Interior Finish – 304 stainless steel
- Refrigeration Unit – self-contained
- Refrigeration Unit Placement – left hand (1 bay features a rear, base unit)



Low Energy Costs



Unprecedented Control



Quicker, Safer Servicing

<sup>1</sup>Not applicable to models RF6.URB.1.SD, RF6.UBF.1.SD and RF7.UBR.2XL.SD. <sup>2</sup>RF6.UBR.1.SD is certified to work in ambient temperatures up to 30°C



RF6.UBR.1.SD



RF7.UBR.2.D6



RF7.UBR.3.GD



RF7.UBR.2XL.SD



RF7.UBR.4.SD

## Key Features

- Fully front breathing, slim refrigeration system to minimise wasted floorspace
- Certified to work in ambient temperatures up to 40°C<sup>2</sup>
- Built-in stainless steel benchtop
- LED lights to interior – 2-4 door models
- Door locks on all doors
- Gastronorm 1/1 compatibility – 2 - 4 Door and 6 and 9 drawer models
- SKOPE-connect app
- Removable 100mm castors
- 3 year warranty

## Options

- Extra shelves and clips
- Set of 4 legs
- Set of 4 low profile castors
- GN 1/1 pans, slide kit and runners<sup>1</sup>

# ReFlex Counter Fridge | Specifications



## Product Details

## 1 Bay, 1 Door Underbench Fridge

Model Number	RF6.UBR.1.SD
Door Finish	Solid
Footprint (m <sup>2</sup> )	0.38
Shelves	2 x adjustable shelves & 1 x fixed floor mounted shelf
Interior Lighting	-
Refrigeration Unit	Self-contained
<b>Storage Capacity</b>	
Internal Volume (L)	139
<b>Performance</b>	
Max Ambient Temperature (°C)	30
Temperature Range (°C)	1 to 4 (adjustable from 0 to 15 via SKOPE-connect)
EEl	23.79
Energy Consumption (kWh/24h)	1.30
Energy Rating	A
Current Draw (Amps)	1.0





**2 Bay, 2 Door Underbench Fridge**

RF7.UBR.2.SD

Solid

0.9

2 x adjustable shelves & 2 x fixed floor mounted shelves

1 x 1400mm, 4W LED

Self-contained

248

40


1 to 4 (adjustable from -2 to 15 via SKOPE-connect)

29.42

1.86

B


2.0



RF7.UBR.2.GD

Glass

0.94

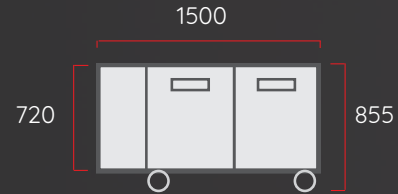

**2 Bay, 2 Door Underbench Large Fridge**

RF7.UBR.2XL.SD

Solid

1.05

2 x adjustable shelves & 2 x fixed floor mounted shelves

1 x 1400mm, 4W LED

Self-contained

333

40

1 to 4 (adjustable from -2 to 15 via SKOPE-connect)

31.47

2.11


B

2.0

Download  
Spec Sheets  
on our website



# ReFlex Counter Fridge | Specifications

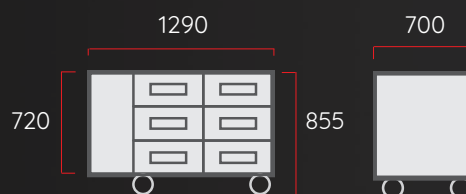

2 Bay, 6 Drawer Underbench Fridge

## Product Details

Model Number	RF7.UBR.2.D6
Door Finish	-
Footprint (m <sup>2</sup> )	0.9
Shelves	-
Interior Lighting	-
Refrigeration Unit	Self-contained

## Storage Capacity

Internal Volume (L)	248
---------------------	-----

## Performance

Max Ambient Temperature (°C)	40
Temperature Range (°C)	1 to 4 (adjustable from -2 to 15 via SKOPE-connect)
EEl	42.8
Energy Consumption (kWh/24h)	2.37
Energy Rating	C
Current Draw (Amps)	2.0





3 Bay, 3 Door Underbench Fridge

RF7.UBR.3.SD      RF7.UBR.3.GD

Solid      Glass

1.23      1.28

3 x adjustable shelves &  
3 x fixed floor mounted shelf

2 x 400mm, 4W LED

Self-contained

387

40

1 to 4 (adjustable from -2 to 15 via  
SKOPE-connect)

39.36      52.81

2.81      3.77


C      D

2.0      2.0

Download  
Spec Sheets  
on our website



# ReFlex Counter Fridge | Specifications

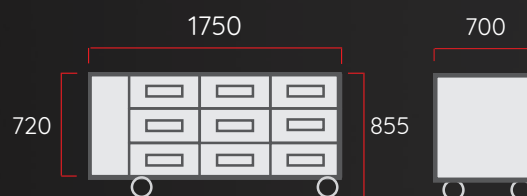

3 Bay, 9 Drawer Underbench Fridge

## Product Details

Model Number	RF7.UBR.3.D9
Door Finish	-
Footprint (m <sup>2</sup> )	1.23
Shelves	-
Interior Lighting	-
Refrigeration Unit	Self-contained

## Storage Capacity

Internal Volume (L)	397
---------------------	-----

## Performance

Max Ambient Temperature (°C)	40
Temperature Range (°C)	1 to 4 (adjustable from -2 to 15 via SKOPE-connect)
EEl	55.87
Energy Consumption (kWh/24h)	3.27
Energy Rating	D
Current Draw (Amps)	2.0





4 Bay, 4 Door Underbench Fridge

RF7.UBR.4.SD	RF7.UBR.4.GD
--------------	--------------

Solid	Glass
-------	-------

1.55	1.61
------	------

4 x adjustable shelves &  
4 x fixed floor mounted shelves

3 x 400mm, 4W LED

Self-contained

526

40

1 to 4 (adjustable from -2 to 15 via  
SKOPE-connect)

47.38	56.17
-------	-------

3.77	4.47
------	------

C	D
---	---

2.0

Download  
Spec Sheets  
on our website




# ReFlex Counter Freezer | Summary

Perfect for:

- Food-service kitchens that require reliable performance
- Operators who need a value-packed product
- Placing throughout your kitchen for optimised work efficiency

## Available Configurations

- Doors – 1, 2, 3
- Door Finish Options – solid, glass, drawers (1 bay only available with solid door)
- Exterior & Interior Finish – 304 stainless steel
- Refrigeration Unit – self-contained
- Refrigeration Unit Placement – left hand (1 bay features a rear, base unit)



Low Energy Costs



Unprecedented Control



Quicker, Safer Servicing

<sup>1</sup>RF6.UBF.1.SD is certified to work in ambient temperatures up to 30°C



RF6.UBF.1.SD



RF6.UBF.2.SD



RF6.UBF.3.SD

## Key Features

- Fully front breathing, slim refrigeration system to minimise wasted floorspace
- Certified to work in ambient temperatures up to 40°C<sup>1</sup>
- Built-in stainless steel benchtop
- LED lights to interior
- Door locks on all doors
- SKOPE-connect app
- Removable 100mm castors
- 3 year warranty

## Options

- Extra shelves and clips
- Set of 4 legs
- Set of 4 low profile castors
- GN 1/1 pans, slide kit and runners

# ReFlex Counter Freezer | Specifications



## Product Details

1 Bay, 1 Door Underbench Freezer

Model Number	RF6.UBF.1.SD
Door Finish	Solid
Footprint (m <sup>2</sup> )	0.38
Shelves	2 x adjustable shelves & 1 x fixed floor mounted shelf
Interior Lighting	-
Refrigeration Unit	Self-contained

## Storage Capacity

Internal Volume (L)	146
---------------------	-----

## Performance

Max Ambient Temperature (°C)	30
Temperature Range (°C)	-21 to -18 (adjustable from -26 to -12 via SKOPE-connect)
EEI	82.89
Energy Consumption (kWh/24h)	4.84
Energy Rating	E
Current Draw (Amps)	1.5





**2 Bay, 2 Door Underbench Freezer**

RF7.UBF.2.SD

Solid

0.9

2 x adjustable shelves & 2 x fixed floor mounted shelves

1 x 400mm, 4W LED

Self-contained

387

40


-21 to -18 (adjustable from -26 to -12 via SKOPE-connect)

74.50

9.45

D

4.0

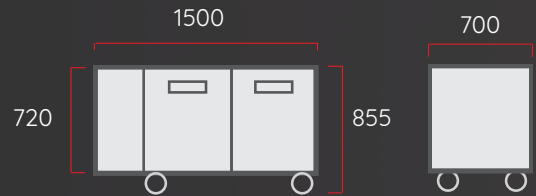

**3 Bay, 3 Door Underbench Freezer**

RF7.UBF.3.SD

Solid

1.23

3 x adjustable shelves & 3 x fixed floor mounted shelves

2 x 400mm, 4W LED

Self-contained

333

40

-21 to -18 (adjustable from -26 to -12 via SKOPE-connect)

81.27

2.11

E

2.0

Download  
Spec Sheets  
on our website





A stainless steel ProSpec counter with four drawers. The counter is shown from a side-on perspective, highlighting the front of the drawers. The drawers have a brushed metal finish and are equipped with recessed handles. The counter top is also made of stainless steel and has a slightly beveled edge. The background is a dark, solid color.

# ProSpec Counter

A chef's precision, crafted into every detail



## ProSpec™

### Customised to work for you

The ProSpec is designed to be customised to fit your individual requirements.

Coming standard with 1,2,3 or 4 bay options with doors or drawers, the ProSpec range can also be fully customised to suit your individual requirements. Each bay can be fitted with a solid door, a set of 2 drawers or a set of 3 drawers. If you choose doors, these can swing left or right to suit the application and have a stay-open function at 90 degrees for ease of access.

Supplied on castors with a stainless steel worktop at 850mm, ProSpec can be used as a worktop or positioned below a custom benchtop. Working heights can be adjusted with optional adjustable legs and low or high castors. The removeable cartridge can be mounted on either the left or right side, to make the most of available kitchen space.



## Eliminate compromise

ProSpec includes the highest level of specification – as standard. Driven by natural refrigerants and featuring 304 stainless steel finishes on all sides, stainless steel gastronorm shelving, door locks and interior lights, ProSpec is built for professionals. With the added advantages of on-board temperature monitoring and smart-phone control via SKOPE-connect, no other product comes close.

# The SKOPE Difference | Nothing performs like a SKOPE




## A Powerful Food Safety Barrier

Enjoy the peace of mind that comes with 304 stainless steel on every surface. The self-repairing chromium oxide layer makes AISI 304 stainless the most hygienic surface for food applications.



## Covers Every Need

ProSpec provides complete integration with gastronorm appliances (ovens, hot boxes, etc), thanks to our E-bracket which allows for simple slideout access to deliver additional storage for GN pans on the same runner.

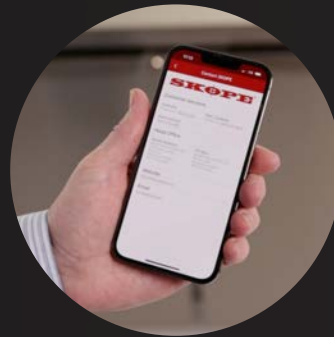

## Unprecedented Control

Choose the optimum climate for your product and obtain temperature history. Do it all at the touch of your smartphone with the free SKOPE-connect app.



## Maximise Your Space

ProSpec's refrigeration system is completely front-breathing and slim in width, meaning you get more cold storage from your footprint. Our interchangeable modular cartridge design means less downtime for quicker maintenance.



### Premium Drawer Storage

With the choice of two depths of GN drawers, you can customise your layout to ergonomic and storage needs. Our full 304 stainless steel drawers run on robust swiss-engineered runners. With no external fixings, they are finished for easy cleaning.



### Unrivalled Energy Efficiency

The ProSpec runs on R290 natural refrigerant to ensure energy efficiency while providing virtually zero global warming impact.



### Efficient Operation

Highly efficient performance in tough environments. Certified to work at ambient temperatures of up to 40°C, making them perfect for even the hottest environments.



### Warranty Protection

SKOPE has always been synonymous with quality. That's why ProSpec is backed by a 3 year warranty.

# ProSpec Counter Fridge | Summary

Perfect for:

- Bespoke kitchens that are designed for optimum efficiency
- Busy kitchens that require the ultimate in refrigeration performance
- Open kitchens that require the sharpest of finishes
- When you want the security of a market-leading warranty

## Available Configurations

- Left or right hand services
- 1, 2, 3 or 4 bays<sup>1</sup>
- GN 1/1 or GN 2/1 compatibility<sup>1</sup>
- Doors, 2 drawers or 3 drawers available, with customised options per bay
- Refrigeration Unit - self contained, remote, positioned on the left or right end



1 Door




2 Drawers



3 Drawers



A Minimalist Aesthetic



Unprecedented Control



A Powerful Food Safety Barrier

<sup>1</sup> GN 2/1 model is only available as a 2 or 3 bay, solid door model. Drawers are not available on GN 2/1 cabinets.



PG11.UBR.1.SD



PG11.UBR.2.D4.RH



PG21.UBR.2.SD



PG11.UBR.3.D9



PG11.UBR.4.SD.RH

## Key Features

- Natural R290 refrigerant
- 304 stainless steel on all surfaces
- Easy to clean seamless design
- Ergonomic handle design in 3mm gauge stainless steel
- Stainless steel shelving as standard on door models
- Tool-free removable louvre with access to cleanable condenser filter
- 3 year warranty

## Options

- Alternate door swings
- Set of legs
- Set of low or high profile castors
- 2 drawers per bay (customised option)
- 3 drawers per bay (customised option)
- Extra GN 1/1 stainless steel wire shelf and slides
- Alternate punched stainless steel GN 1/1 shelves

# ProSpec Counter GN1/1 Fridge | Specifications



## Product Details


1 Bay, Solid Door, Underbench Fridge

Model Number	PG11.UBR.1.SD
Body Finish (interior/exterior - all sides)	304 AISI stainless steel
Footprint (m <sup>2</sup> )	0.58
Volume (L)	126
Shelves	2 x 304 stainless steel GN 1/1 wire shelves
Drawers	-
Interior Lighting	1 x 400 mm, 4W LED light (door-activated)
Refrigeration Unit	Self-contained R290 (standard) or Remote (MTO)
Right Hand Services	RH model
Locks	1 barrel lock per door

## Performance

Max Ambient Temperature (°C)	40
Temperature Range (°C)	1 to 4 (adjustable from -2 to 15 via SKOPE-connect)
EEl	TBC
Energy Consumption (kWh/24h)	1.21
Energy Rating	TBC
Current Draw (Amps)	2.0



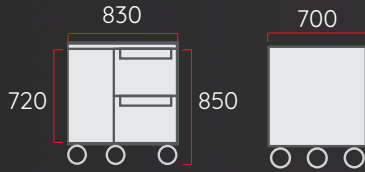

1 Bay, 2 Drawer, Underbench Fridge

PG11.UBR.1.D2

304 AISI stainless steel

0.58

126

-

2 x 200mm deep GN 1/1 sized drawers

-

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per drawer

40

1 to 4 (adjustable from -2 to 15 via SKOPE-connect)

TBC

1.26

TBC

2.0



1 Bay, 3 Drawer, Underbench Fridge

PG11.UBR.1.D3

304 AISI stainless steel

0.58

126

-

3 x 150mm deep GN 1/1 sized drawers

-

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per drawer

40

1 to 4 (adjustable from -2 to 15 via SKOPE-connect)

TBC

1.42

TBC

2.0

Download  
Spec Sheets  
on our website



# ProSpec Counter GN1/1 Fridge | Specifications



## Product Details


## 2 Bay, Solid Door, Underbench Fridge

Model Number	PG11.UBR.2.SD
Body Finish (interior/exterior - all sides)	304 AISI stainless steel
Footprint (m <sup>2</sup> )	0.9
Volume (L)	288
Shelves	4 x 304 stainless steel wire GN 1/1 shelves
Drawers	-
Interior Lighting	1 x 400 mm, 4W LED light (door-activated)
Refrigeration Unit	Self-contained R290 (standard) or Remote (MTO)
Right Hand Services	RH model
Locks	1 barrel lock per door

## Performance

Max Ambient Temperature (°C)	40
Temperature Range (°C)	1 to 4 (adjustable from -2 to 15 via SKOPE-connect)
EI	TBC
Energy Consumption (kWh/24h)	1.64
Energy Rating	TBC
Current Draw (Amps)	2.0



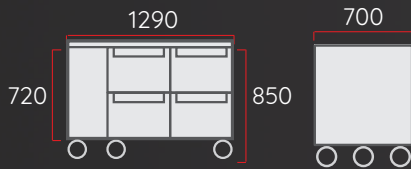

**2 Bay, 2 Drawer, Underbench Fridge**

PG11.UBR.2.D4

304 AISI stainless steel

0.9

288

-

4 x 200mm deep GN 1/1 sized drawers

-

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per drawer

40


1 to 4 (adjustable from -2 to 15 via SKOPE-connect)

TBC

1.79

TBC

2.0

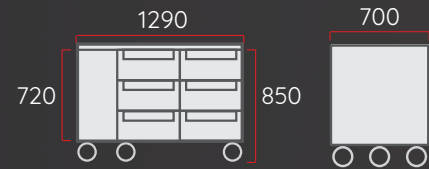

**2 Bay, 3 Drawer, Underbench Fridge**

PG11.UBR.2.D6

304 AISI stainless steel

0.9

288

-

6 x 150mm deep GN 1/1 sized drawers

-

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per drawer

40

1 to 4 (adjustable from -2 to 15 via SKOPE-connect)

TBC

2.1


TBC

2.0

Download  
Spec Sheets  
on our website



# ProSpec Counter GN1/1 Fridge | Specifications

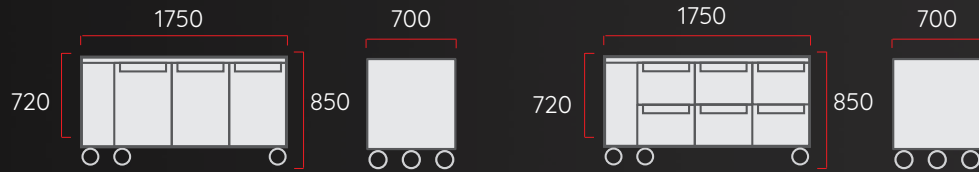


## Product Details

3 Bay, Solid Door, Underbench Fridge

3 Bay, 2 Drawer, Underbench Fridge

Model Number	PG11.UBR.3.SD	PG11.UBR.3.D6
Body Finish (interior/exterior - all sides)	304 AISI stainless steel	304 AISI stainless steel
Footprint (m <sup>2</sup> )	0.58	1.23
Volume (L)	447	447
Shelves	6 x 304 stainless steel wire GN 1/1 shelves	-
Drawers	-	6 x 200mm deep GN 1/1 sized drawers
Interior Lighting	2 x 400 mm, 4W LED light (door-activated)	-
Refrigeration Unit	Self-contained R290 (standard) or Remote (MTO)	Self-contained R290 (standard) or Remote (MTO)
Right Hand Services	RH model	RH model
Locks	1 barrel lock per door	1 barrel lock per drawer
<b>Performance</b>		
Max Ambient Temperature (°C)	40	40
Temperature Range (°C)	1 to 4 (adjustable from -2 to 15 via SKOPE-connect)	1 to 4 (adjustable from -2 to 15 via SKOPE-connect)
EEl	TBC	TBC
Energy Consumption (kWh/24h)	2.68	2.68
Energy Rating	TBC	TBC
Current Draw (Amps)	2.0	2.0



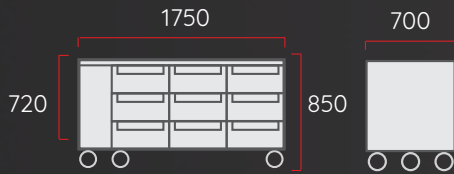

**3 Bay, 3 Drawer, Underbench Fridge**

PG11.UBR.3.D9

304 AISI stainless steel

0.58

432

-

9 x 150mm deep GN 1/1 sized drawers

-

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per drawer

40

1 to 4 (adjustable from -2 to 15 via SKOPE-connect)

TBC

3.14

TBC

1.23



**4 Bay, Solid Door, Underbench Fridge**

PG11.UBR.4.SD

304 AISI stainless steel

1.55

609

8 x 304 stainless steel wire GN 1/1 shelves

3 x 400 mm, 4W LED lights (door-activated)

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per door

40

1 to 4 (adjustable from -2 to 15 via SKOPE-connect)

TBC

3.19

TBC

2.0

Download  
Spec Sheets  
on our website



# ProSpec Counter GN2/1 Fridge | Specifications



## Product Details


## 2 Bay, Solid Door, Underbench Fridge

Model Number	PG21.UBR.2.SD
Body Finish (interior/exterior - all sides)	304 AISI stainless steel
Footprint (m <sup>2</sup> )	1.43
Volume (L)	538
Shelves	2 x 304 stainless steel wire GN 2/1 shelves per door
Interior Lighting	1 x 400 mm, 4W LED light (door-activated)
Refrigeration Unit	Self-contained R290 (standard) or Remote (MTO)
Right Hand Services	RH model
Locks	1 barrel lock per door

## Performance

Max Ambient Temperature (°C)	40
Temperature Range (°C)	1 to 4 (adjustable from -2 to 15 via SKOPE-connect)
EEl	TBC
Energy Consumption (kWh/24h)	2.84
Energy Rating	TBC
Current Draw (Amps)	2.8



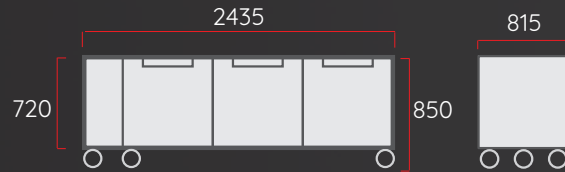

**3 Bay, Solid Door, Underbench Fridge**

PG21.UBR.3.SD

304 AISI stainless steel

1.98

857

2 x 304 stainless steel wire GN 2/1 shelves per door

2 x 400 mm, 4W LED light (door-activated)

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per door

40

1 to 4 (adjustable from -2 to 15 via SKOPE-connect)

TBC

3.60

TBC

2.8

Download  
Spec Sheets  
on our website



# ProSpec ChefBase | Summary

Perfect for:

- Cold storage immediately under cooking equipment
- Busy kitchens that require the ultimate in refrigeration performance
- Open kitchens that require the sharpest of finishes
- When you want the security of a market-leading warranty

## Available Configurations

- 1 or 2 bays
- Refrigeration unit - self contained, remote



2 Drawers per bay



A Minimalist Outlook



Unprecedented Control



A Powerful Food Safety Barrier



PG11.CBR.1.D2



PG21.CBR.2.D4

## Key Features

- Natural R290 refrigerant
- 304 AISI stainless steel on all surfaces
- Built-in stainless steel surface with reinforced no-drip (marine) edge
- Reinforced heatshield top, to hold cooking equipment up to 400kgs in weight<sup>1</sup>
- Fully extendable, lockable refrigerated drawers
- GN compatibility - 2 drawer model fits GN 1/1 and 1/6 pans up to 100mm deep and the 4 drawer model fits GN 2/1 trays up to 100mm deep (sold seperately)
- SKOPE-connect app
- Certified to work in ambient temperatures up to 40°C
- 3 year warranty

# SKOPE

<sup>1</sup> Weight bearing capacity varies by model.

# ProSpec ChefBase | Specifications



## Product Details


## 1 Bay ChefBase

Model Number	PG11.CBR.1.D2
Body Finish (interior/exterior - all sides)	304 AISI stainless steel
Footprint (m <sup>2</sup> )	0.75
Volume (L)	147
Drawers	2 x GN 1/1 sized drawers
Interior Lighting	-
Refrigeration Unit	Self-contained R290 (standard) or Remote (MTO)
Locks	1 barrel lock per drawer

## Performance

Max Ambient Temperature (°C)	40
Temperature Range (°C)	1 to 4 (adjustable from 0 to 15 via SKOPE-connect)
EEL	TBC
Energy Consumption (kWh/24h)	2.55
Energy Rating	TBC
Current Draw (Amps)	1.6



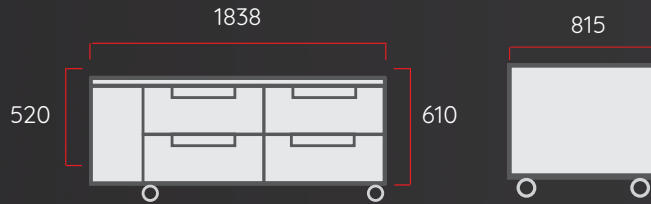

**2 Bay ChefBase**

PG21.CBR.2.D4

304 AISI stainless steel

1.5

373

4 x GN 2/1 sized drawers

-

Self-contained R290 (standard) or Remote (MTO)

1 barrel lock per drawer

40

1 to 4 (adjustable from 0 to 15 via SKOPE-connect)

TBC

5.00

TBC

1.8

Download  
Spec Sheets  
on our website



# ProSpec Counter Freezer | Summary

Perfect for:

- Bespoke kitchens that are designed for optimum efficiency
- Busy kitchens that require the ultimate in freezer performance
- Open kitchens that require the sharpest of finishes

## Available Configurations

- Left or right hand services
- 1, 2 or 3 bays<sup>1</sup>
- GN 1/1 or GN 2/1 compatibility<sup>1</sup>
- Doors per bay (standard), 2 or 3 drawers, available with customised options per bay<sup>1</sup>
- Refrigeration Unit - self contained, remote, positioned on the left or right end



1 Door




2 Drawers<sup>1</sup>



3 Drawers<sup>1</sup>



A Minimalist Aesthetic



Unprecedented Control



A Powerful Food Safety Barrier

<sup>1</sup> GN 2/1 model is only available as a 2 bay, solid door model. Drawers are not available on GN 2/1 cabinets.



PG11.UBF.1.SD



PG11.UBF.2.SD.RH



PG11.UBF.3.SD



PG21.UBF.2.SD


## Key Features

- Natural R290 refrigerant
- 304 stainless steel on all surfaces
- Easy to clean seamless design
- Ergonomic handle design in 3mm gauge stainless steel
- Stainless steel shelving as standard on door models
- Tool-free removable louvre with access to cleanable condenser filter
- 3 year warranty

## Options

- Alternate door swings
- Set of legs
- Set of low or high profile castors
- 2 drawers per bay (customised option)
- 3 drawers per bay (customised option)
- Extra GN 1/1 stainless steel wire shelf and slides
- Alternate punched stainless steel GN 1/1 shelves

# ProSpec Counter GN1/1 Freezer | Specifications

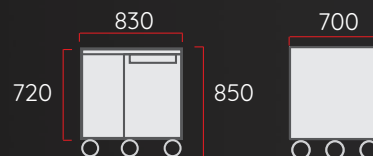

## Product Details


1 Bay, Solid Door, Underbench Freezer

Model Number	PG11.UBF.1.SD
Body Finish (interior/exterior - all sides)	304 AISI stainless steel
Footprint (m <sup>2</sup> )	0.58
Volume (L)	126
Shelves	2 x 304 stainless steel wire GN 1/1 shelves
Interior Lighting	1 x 400 mm, 4W LED light (door-activated)
Refrigeration Unit	Self-contained R290 (standard) or Remote (MTO)
Right Hand Services	RH model
Locks	1 barrel lock per door

## Performance

Max Ambient Temperature (°C)	40
Temperature Range (°C)	-21 to -18 (adjustable from -26 to -12 via SKOPE-connect)
EI	TBC
Energy Consumption (kWh/24h)	3.39
Energy Rating	TBC
Current Draw (Amps)	3.6



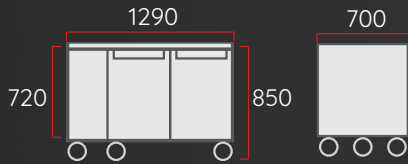

### 2 Bay, Solid Door, Underbench Freezer

PG11.UBF.2.SD

304 AISI stainless steel

0.9

288

2 x 304 stainless steel wire GN 1/1 shelves per door

1 x 400 mm, 4W LED light (door-activated)

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per door

40

-21 to -18 (adjustable from -26 to -12 via SKOPE-connect)

TBC

4.33

TBC

3.6



### 3 Bay, Solid Door, Underbench Freezer

PG11.UBF.3.SD

304 AISI stainless steel

1.23

447

2 x 304 stainless steel wire GN 1/1 shelves per door

2 x 400 mm, 4W LED light (door-activated)

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per door

40

-21 to -18 (adjustable from -26 to -12 via SKOPE-connect)

TBC

6.72

TBC

3.6

Download  
Spec Sheets  
on our website



# ProSpec Counter GN2/1 Freezer | Specifications

## Product Details

Model Number

Body Finish (interior/exterior - all sides)

Footprint (m<sup>2</sup>)

Volume (L)

Shelves

Interior Lighting

Refrigeration Unit

Right Hand Services

Locks

## Performance

Max Ambient Temperature (°C)

Temperature Range (°C)


EEl

Energy Consumption (kWh/24h)

Energy Rating

Current Draw (Amps)



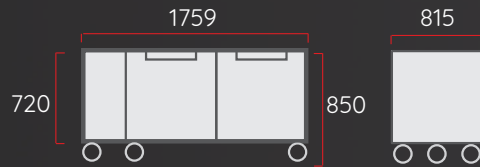

**2 Bay, Solid Door, Underbench Freezer**

PG21.UBF.2.SD

304 AISI stainless steel

1.43

538

2 x 304 stainless steel wire GN 2/1 shelves per door

1 x 400 mm, 4W LED light (door-activated)

Self-contained R290 (standard) or Remote (MTO)

RH model

1 barrel lock per door

40

-21 to -18 (adjustable from -26 to -12 via SKOPE-connect)

TBC

6.37

TBC

3.6

Download  
Spec Sheets  
on our website





Hubbard Systems (A division of HTC Trading Ltd)  
106 Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL  
sales@hubbardsystems.co.uk  
01473 350046  
www.hubbardsystems.co.uk

SKOPE  
www.skope.com

Information contained in this document has been checked for accuracy at the time of production. SKOPE reserves the right to alter any detail without notice. Conditions are subject to change without notice. The photographs used in this publication are for illustrative purposes only. Minor design changes may result in slight variations between the product illustrated and the final delivered product.

Copyright © SKOPE Industries Limited. All rights reserved. SKOPE Industries Ltd reserves the right to alter specifications without notice. Visit [www.skope.com](http://www.skope.com) for the most recent specification documents.