AF 87 OX XSafe

Ice maker with built-in bin, up to 70 kg



CHARACTERISTICS

- It produces granular ice flakes with a hardness of 75%.
- Ice scoop holder securely positioned in the ice bin.
- Computerized Advanced Diagnostic Testing.
- Inlet and outlet airflow on the front panel (air-cooled model only) for built-in installation.
- Front-access condenser air filter, removable and washable (air-cooled version only).
- Easy access to the front panel of the machine's technical/service area.
- XSafe: All-natural, machine-integrated sanitizing system. It acts automatically and continuously keeping the machine clean and sanitized.



AF Flake
FLAKE
-

Model	Cubetto	Ø	H	Weight
AF Flake				

CONDENSATION SYSTEM

Air
Water

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1
220-240\60\1

BIN CAPACITY

KG
25

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%

IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

AF 87 OX *XSafe*

Scotsman Ice Systems

Ice maker with built-in bin, up to 70 kg

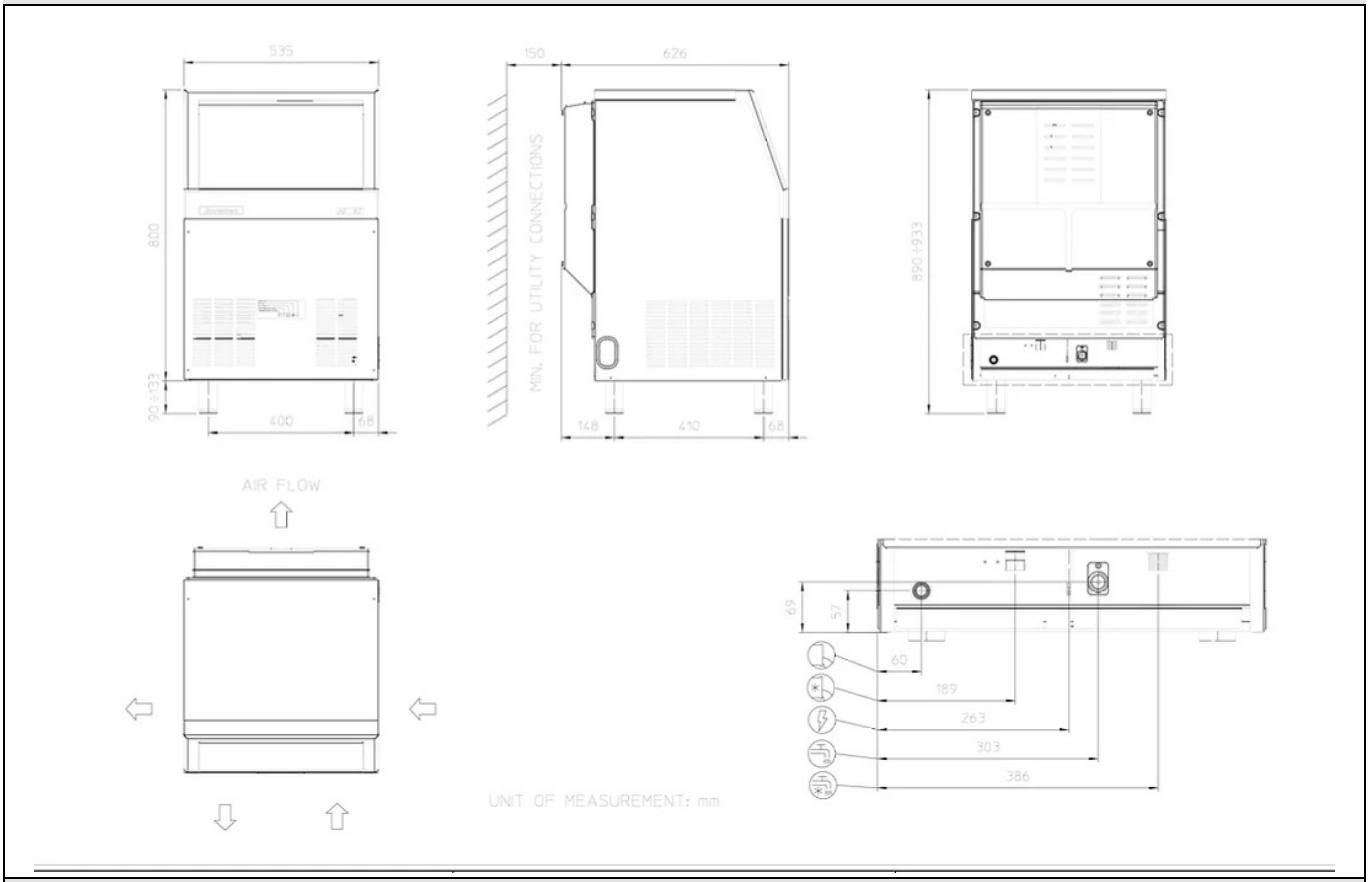

MACHINE DATA	SHIPPING DATA	(*) The data refers to the following temperature conditions:
Dimensions (LxWxH): 535 x 626 x 889 mm Net weight 51 kg	Dimensions (LxWxH): 60 x 69 x 98 cm Net weight 58 kg	32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
AF 87 AS 230/50/1	230\50\1	A	70	68	56	0,40	6,0	2,0	275	1,50	10
AF 87 AS LABS	230\50\1	A	70	68	56	0,40	6,0	2,0	275	1,50	10
AF 87 WS 230/50/1	230\50\1	W	75	72	62	0,50	6,0	54,0	220	1,50	10
AF 87 WS LABS	230\50\1	W	75	72	62	0,50	6,0	54,0	220	1,50	10
AF 87 AS 220-240/60/1	220-240\60\1	A	84	80	64	0,50	6,0	3,0	285	1,50	10